



Rigid conduit/IMC fittings

Locknuts




Locknuts – steel/zinc plated

Cat. No.	Conduit Size (in.)	Dimensions (in.)		Std. Ctn.
		A	B	
LN-100-SC	3/8	—	—	1,000
LN-101-SC	1/2	0.125	1.140	1,000
LN-102	3/4	0.140	1.420	1,000
LN-103	1	0.170	1.770	500
LN-104	1 1/4	0.170	2.281	200
LN-105	1 1/2	0.170	2.598	100
LN-106	2	0.187	3.175	50
LN-107	2 1/2	0.375	3.562	30
LN-108	3	0.375	4.250	25
LN-109	3 1/2	0.438	4.803	25
LN-110	4	0.438	5.402	25
LN-111	5	0.500	6.674	10
LN-112	6	0.561	7.934	10



Sealing locknuts – steel/zinc plated


Cat. No.	Conduit Size (in.)	Dimensions (in.)		Std. Ctn.
		A	B	
LS-101	1/2	0.26	1.12	1,000
LS-102	3/4	0.27	1.37	1,000
LS-103	1	0.28	1.75	500
LS-104	1 1/4	0.32	2.06	200
LS-105	1 1/2	0.32	2.37	100
LS-106	2	0.32	2.87	50
LS-107	2 1/2	0.32	3.43	50
LS-108	3	0.32	4.12	50
LS-109	3 1/2	0.32	4.62	50
LS-110	4	0.32	5.18	25

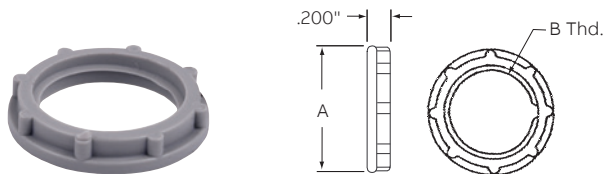

Locknuts – non-metallic

Cat. No.	Conduit Size (in.)	Dimensions (in.)		Std. Ctn.
		A	B	
LN-501	1/2	1.30	1 1/2–14	100
LN-502	3/4	1.40	3/4–14	100
LN-503	1	1.70	1–1 1/2	50

Material: Nylon 6/6.
Color: Gray.




Locknuts – die-cast zinc



Cat. No.	Conduit Size (in.)	Dimensions (in.)		Std. Ctn.
		A	B	
LN-201	1/2	0.125	1.140	2,000
LN-202	3/4	0.140	1.420	1,000
LN-203	1	0.170	1.770	1,000
LN-204	1 1/4	0.170	2.281	500
LN-205	1 1/2	0.170	2.598	500
LN-206	2	0.187	3.175	200
LN-207	2 1/2	0.375	3.562	100
LN-208	3	0.375	4.25	100
LN-209	3 1/2	0.438	4.803	40
LN-210	4	0.438	5.402	40

CSA File No. LR- 12798.



Grounding locknuts – malleable iron/zinc plated

Cat. No.	Conduit Size (in.)	Dimensions (in.)		Std. Ctn.
		A	B	
LG-401	1/2	0.125	1.140	100
LG-402	3/4	0.14	1.420	100
LG-403	1	0.17	1.770	50
LG-404	1 1/4	0.17	2.281	50
LG-405	1 1/2	0.17	2.598	50
LG-406	2	0.187	3.175	25
LG-407	2 1/2	0.375	3.562	10
LG-408	3	0.375	4.250	10
LG-409	3 1/2	0.438	4.803	50
LG 410	4	0.438	5.402	5



Thin construction locknuts – steel/zinc plated

Cat. No.	Conduit Size (in.)	Unit Qty	Std. Ctn.
SPLN-107	2 1/2	30	30
SPLN-108	3	25	25
SPLN-109	3 1/2	25	25
SPLN-110	4	25	25