


S1R6PTFITCHI

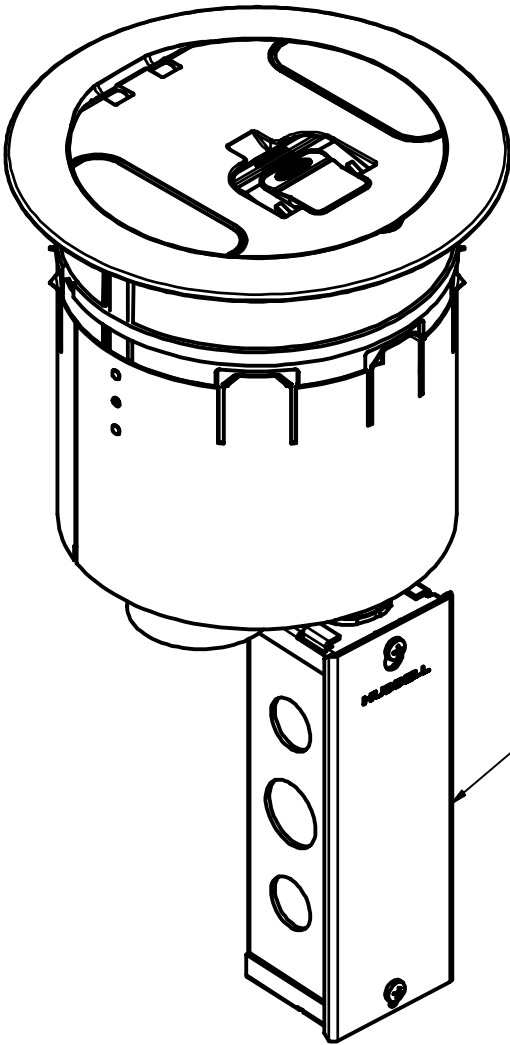

JUNCTION BOX

S1R6PTFIT

NOTES:

- 1. S1R6PT SUB-PLATE SUPPLIED WITH PRE WIRED , MOLDED , FOUR POSITION 20A, 125V BLACK RECEPTACLES.
- 2. FOLLOW MANUFACTURERS DIRECTIONS AND GUIDELINES FOR THE INSTALLATION AND MOUNTING OF THE POKE THRU AND ALL OF THE ASSOCIATED COMPONENTS.
- 3. FOR CAT NO. ENDS WITH FITCHI MEANS JUNCTION BOX IS NOT INCLUDED.

REV	DESCRIPTION	APP	DATE
THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE			
TITLE 6" RECESSED POKE-THROUGH			
TOLERANCES UNLESS OTHERWISE SPECIFIED  .XX = ± .01 .XXX = ± .005 ANGLES = ± 2'		WIRING DEVICE-KELLEMS HUBBELL INCORPORATED SHELTON, CT	
		DR. BY	APP. BY
		TR. BY	SCALE
		CHK. BY	DATE