


4.75 in (121 mm)

Shown actual size: Maestro dimmers and 2-gang Claro wallplate in White (WH).

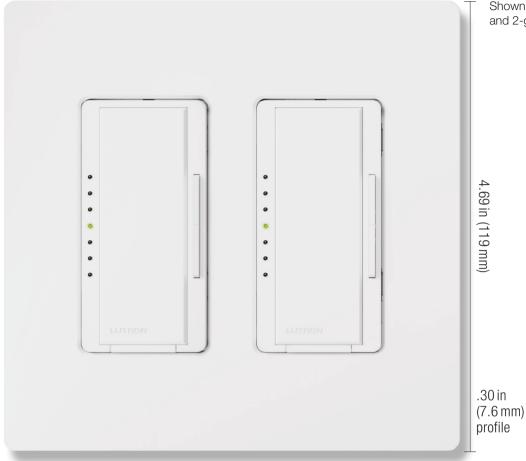

Product family features

- · Can be used in conjunction with the following dimmer(s), switch(es), sensor(s), and accessories: Caséta Wireless, Diva, Luméa, Maestro, Pico wireless, Skylark, Skylark Contour, Sunnata, Vive Maestro Wireless controls, and Vive accessories
- · All Lutron wallplates are screwless, seamless, and have no visible hardware; the front plate securely snaps into the alignment adapter plate
- Full line of wiring devices in Designer style opening
- · Blank inserts available for Gloss (DV-BI-) and Satin Colors (SC-BI-)
- · Customize your designer wallplate with engraving; visit lutron.com/engraving to get started

Ganging and derating

- · Designer wallplates use standard ganging
- · Requires fins to be removed from dimmers for proper spacing
- · May require derating (i.e., reduction of dimmer capacity due to fin removal)

Available finishes

Use **BOLD** color code in model number (Example: SC-1-PL) Gloss







<u>GR</u> Ivory




<u>**BL**</u> Black Brown








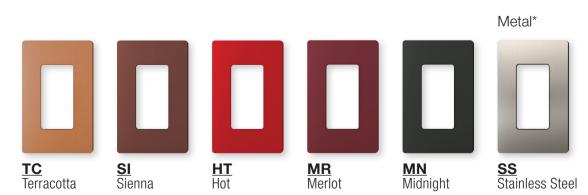

Stainless Steel metal wallplates include black plastic trim/adapter, visible from side. Match with separate Black (BL) or Midnight (MN) controls and accessories.

Wallplates for Caséta Wireless, Diva, Luméa, Maestro, Maestro Wireless, Pico wireless, Skylark, Skylark Contour, Sunnata, Vive Maestro Wireless controls, and Vive accessories



1-gang*,**	CW-1- XX 1
W: 2.94 in (75 mm)	SC-1- XX ²
2-gang*,**	CW-2- XX 1
W: 4.75 in (121 mm)	SC-2- XX ²
3-gang*,**	CW-3- XX 1
W: 6.56in (167 mm)	SC-3- XX ²
4-gang*,**	CW-4- XX 1
W: 8.37 in (213 mm)	SC-4- XX ²
5-gang*	CW-5- XX 1
W: 10.18in (259 mm)	SC-5- XX ²
6-gang*	CW-6- XX 1
W: 12in (305mm)	SC-6- XX ²

Important note

Multiple devices with line and low-voltage can be mounted behind a common wallplate using a standard barrier backbox. For more information consult Lutron Application Note #213, Combining Low-Voltage and Line Voltage Wiring Devices in a Multi-Gang Box, at lutron.com/applicationnotes.

- Stainless Steel metal wallplates include black plastic trim/adapter, visible from side. Match with separate Black (BL) or Midnight (MN) controls and accessories.
- Bulk packaging available for Gloss colors. For more information, contact Customer Service at 1.888.LUTRON1.

XX¹: Gloss and metal color codes

XX²: Satin colors codes **XX**³: Gloss color codes



Custom engraving available for all Designer, Traditional, New Architectural, and Architectural style wallplates (except Stainless Steel). For wallplate engraving schedules, go to lutron.com/engraving.

Cable jacks



•	F-style, 75-Ohm coaxial cable
	Wallplate sold separately

CA-CJ-XX³ Single cable jack SC-CJ-XX2

Telephone jacks



• 6-conductor telephone jack, RJ11

CA-PJ-**XX**³

SC-PJ-XX²

Wallplate sold separately

Single telephone jack

6-port frame



- Shipped with six blanks in matching colors
- Connectors sold separately
- · Connectors snap in (no tools required)
- Connectors available in White (WH), unless noted

Field customizable 6-port frame

6-port frame	CA-6PF- XX 1
	SC-6PF- <u>XX</u> 2

Connectors for 6-port frame



8-conductor,	CON-1P-C5E- XX 3
RJ45 category 5e	
8-conductor,	CON-1P-C6- XX 3
RJ45 category 6	











Cable jack F-style, CON-1C-XX3 75-Ohm coaxial cable



BNC jack

BNC connector, 50-Ohm	CON-1B-WH
Connectors only for use with 6-port frame.	

Receptacles



Tamper-resistant receptacles include tamper-resistant shutter mechanism (shutters are white)

Receptacles

15A 125V	CAR-15- XX
	SCR-15- XX
20A 125V	SCR-20- XX

Tamper-resistant receptacles

15A 125V	CARS-15-TR- XX 1
	SCRS-15-TR-XX ²
20A 125V	SCRS-20-TR-XX ²

USB receptacles



Includes two USB ports

 Ports are rated for a minimum of 10,000 insertions and removals

Tamper-resistant USB receptacles

15A 125V	CAR-15-UBTR-XX
	SCR-15-UBTR-XX

XX1: Gloss color codes

XX²: Satin color codes

XX³: Available in White (WH) and Black (BL)

Wallplates not included. Order separately.