



Shown actual size: Diva preset dimmer and 1-gang Claro wallplate in White (WH).

Product family features

- Large paddle switch with a captive linear slide dimmer for a standard Designer wallplate opening
- Preset dimmer
- LED+, reverse-phase, and 0-10V models available
- Coordinating Claro, Satin Colors, and Stainless Steel wallplates only available separately
- All models must be derated unless otherwise noted. Visit lutron.com/multigang for more information.

Control types

- Single-pole (1 location)
- 3-way or 4-way (2 or more locations)

Direct load type compatibility

- Dimmable LED/CFL lighting (screw-base)
- Incandescent/halogen lighting
- Magnetic low-voltage lighting
- Electronic low-voltage lighting
- LED lighting
- Fluorescent lighting
- Switched lighting/fan/motor
- Ceiling fans

Load type requiring load interface

- Neon/cold cathode lighting

Lighting load interfaces may be required for some additional load type, voltage, and capacity combinations. For additional information see "Lighting Load Interfaces."

Available finishes


Use **BOLD** color code in model number (Example: DV-600P-**BR**)
Gloss



Satin Colors



Metal wallplate*

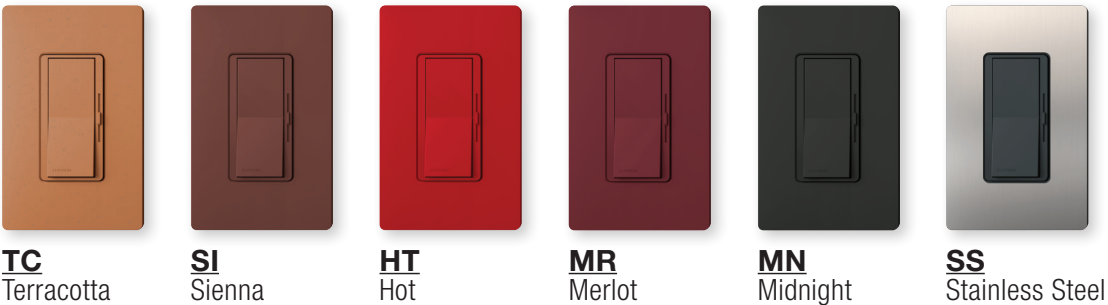

* Stainless Steel metal wallplate only available separately and includes black plastic trim/adaptor, visible from side. Match with separate Black (BL) or Midnight (MN) controls.

Dimmers



- Paddle turns on/off
- Slide up to brighten, down to dim
- LED+ dimmers provide reliable dimming of dimmable LEDs/CFLs, as well as halogens and incandescents

Dimmable LED/CFL (screw-base) dimmers

Incandescent/halogen dimmers

LED+ dimmers

3-way/single-pole	DVCL-153P- XX ¹
120 V 150 W (LED/CFL), 600 W (Inc)	DVSCCL-153P- XX ²

3-way/single-pole	DVCL-253P- XX ¹
120 V 250 W (LED/CFL), 600 W (Inc)	DVSCCL-253P- XX ²
350 W (Hi-lume 1% LED driver, max. 8)	

Visit lutron.com/LEDfinder for our online compatibility tool.

Adjustable low-end trim.

Dimmable LED/CFL (screw-base) dimmers

Incandescent/halogen dimmers

Electronic low-voltage dimmers

Reverse-phase dimmers*

3-way/single-pole	DVRP-253P- XX ¹
120 V 250 W (LED/CFL), 500 W (Inc), 500 W (ELV)	DVSCR-253P- XX ²

When dimming LEDs/CFLs, only bulbs marked or rated as dimmable with reverse-phase may be used.

Visit lutron.com/LEDfinder for our online compatibility tool.

No low-end trim.

XX¹: Gloss color codes
XX²: Satin color codes
Wallplates not included. Order separately.

Incandescent/halogen dimmers

Dimmers

Single-pole	DV-600P- XX ¹
120 V 600 W	DVSC-600P- XX ²
Single-pole	DV-10P- XX ¹
120 V 1000 W	DVSC-10P- XX ²
3-way/	DV-603P- XX ¹
120 V 600 W	DVSC-603P- XX ²
3-way/	DV-103P- XX ¹
120 V 1000 W	DVSC-103P- XX ²

Magnetic low-voltage dimmers

Dimmers

Single-pole	DVLV-600P- XX ¹
120 V 600 VA (450 W)	DVSCLV-600P- XX ²
Single-pole	DVLV-10P- XX ¹
120 V 1000 VA (800 W)	DVSCLV-10P- XX ²
3-way/	DVLV-603P- XX ¹
120 V 600 VA (450 W)	DVSCLV-603P- XX ²
3-way/	DVLV-103P- XX ¹
120 V 1000 VA (800 W)	DVSCLV-103P- XX ²

The stated VA (volt-ampere) rating includes the magnetic transformer heat losses and the lamp load. The stated W (watt) rating is the maximum lamp wattage based on assumed 20% transformer loss.

Electronic low-voltage dimmers

Dimmers*

Single-pole	DVELV-300P- XX ¹
120 V 300 W	DVSC-300P- XX ²
3-way	DVELV-303P- XX ¹
120 V 300 W	DVSC-303P- XX ²

* Requires neutral wire connection

3-wire LED driver/fluorescent ballast dimmers

Dimmers*

3-way/single-pole	DVF-103P- XX ¹
120 V 8 A	DVSCF-103P- XX ²
3-way/single-pole	DVF-103P-277- XX ¹
277 V 6 A	DVSCF-103P-277 XX ²

No derating required if ganged.

Adjustable low-end trim.

0-10V LED/fluorescent fixture dimmers
(current sink control)

Dimmers

3-way/single-pole	DVSTV- XX ¹
120–277 V 8 A	DVSCSTV- XX ²
50 mA max control current	

No power pack required.

No derating required if ganged.

0-10V LED/fluorescent fixture dimmers
(current sink control – power pack required)

Dimmers*

Single-pole	DVTV- XX ¹
30 mA max control current	DVSCTV- XX ²

Control provides dimming signal only. For dimming with on/off switching, **use with Lutron power pack**: PP-DV or PP-347H.

Compatible with any IEC 60929 Annex E compliant driver or ballast.

No derating required if ganged.

XX¹: Gloss color codes
XX²: Satin color codes
Wallplates not included. Order separately.

Tu-Wire fluorescent ballast dimmers

Dimmers

3-way/single-pole	DVFTU-5A3P- XX ¹
120 V 5 A	DVSCFTU-5A3P- XX ²

Compatible with Advance Mark X and Sylvania POWERSENSE fluo escent ballasts, in addition to Lutron Tu-Wire.

* Requires neutral wire connection