

SYLVANIA *DOUBLElife*™

Incandescent Lamps



The SYLVANIA exclusive family of double life products last twice as long and are almost as bright as conventional lamps.

Double life lamps are ideal for fixtures that are used frequently or in hard-to-reach areas. They are available in standard A-Shape, Three-Way, Reflector, Ceiling Fan, Appliance and decorative B-shape, Candle and Globe shapes.

Key Features & Benefits

Double life lamps are available in a wide variety of bulb shapes and finishes:

- A-shape clear & soft white
- Three-Way soft white
- B10 clear, crystal & frosted
- B13 Ceiling Fan clear
- Globe clear & white
- A15 Ceiling Fan clear & soft white
- A15 Appliance clear
- Reflectors
- Candle clear

Product Offering

	Wattage
A-Shape	
A19	40 & 60W
Three-Way	
A21	30/100/150 & 50/100/150W
B-Shape	
Candelabra	15, 25, 40 & 60W
Medium	25, 40 & 60W
Globe	
G25	25, 40 & 60W
Ceiling Fan	
B13	40 & 60W
A15	40 & 60W
Reflector	
R20	45W
BR30	65W
BR40	65W
Candle	
C7	4W

Application Information

Applications

- Accent and display lighting
- Decorative lighting
- Hotels
- Indoor
- Residential
- Restaurants
- Retail
- Wall washing

Application Notes

1. A-Shape & Three-Way types for general purpose
2. BR & R Reflector types for directional use
3. B-Shape, Candle & Globe types for decorative use
4. Ceiling Fan and Appliance types for specialty applications

SEE THE WORLD IN A NEW LIGHT **SYLVANIA**



Specification Data

Catalog #	Type
Project	
Comments	
Prepared by	

Ordering Information

Item Number	Ordering Abbreviation	SKU Count	Case Count	Watts	Base	Volts	Finish	Average Rated Life (hrs.)	Lumens	MOL (in.)
A19										
11581	40A/DL/RP	8	160	40	Medium	120	Soft White	3,000	390	4 7/16
11670	40A/DL/VERT/RP	4	48	40	Medium	120	Soft White	3,000	390	4 7/16
10874	40A/DL/VERT/RP	8	288	40	Medium	120	Soft White	3,000	390	4 7/16
10939	40A/DL//RP	4	48	40	Medium	120	Soft White	3,000	390	4 7/16
11646	40A/DL/RP	2	24	40	Medium	120	Clear	3,000	395	4 7/16
11204	60A/DL/RP	4	48	60	Medium	120	Soft White	2,000	770	4 7/16
11227	60A/DL/RP	2	24	60	Medium	120	Soft White	2,000	770	4 7/16
10233	60A/DL/VERT/RP	4	144	60	Medium	120	Soft White	2,000	770	4 7/16
10236	60A/DL/RP	4	160	60	Medium	120	Soft White	2,000	770	4 7/16
11563	60A/DL/RP	8	160	60	Medium	120	Soft White	2,000	770	4 7/16
11672	60A/DL/VERT/RP	4	48	60	Medium	120	Soft White	2,000	770	4 7/16
10875	60A/DL/RP	8	288	60	Medium	120	Soft White	2,000	770	4 7/16
11260	60A/DL/RP	2	24	60	Medium	120	Clear	2,000	790	4 7/16
A21 3-Way										
19380	30/100A21/DL/RP	1	12	30/70/100	3C-Medium	120	Soft White	2,400	270/830/1100	5 5/16
19365	30/100A21/DL/RP	2	24	30/70/100	3C-Medium	120	Soft White	2,400	270/830/1100	5 5/16
18044	50/150A21/DL/RP	1	12	50/100/150	3C-Medium	120	Soft White	2,400	510/1280/1790	5 5/16
18167	50/150A21/DL/RP	2	24	50/100/150	3C-Medium	120	Soft White	2,400	510/1280/1790	5 5/16
B10										
13315	15B10/DL/BL	2	12	15	Candelabra	120	Clear	3,000	65	3 7/8
13307	15B10/DL/BL	4	24	15	Candelabra	120	Clear	3,000	65	3 7/8
13316	25B10/DL/BL	2	12	25	Candelabra	120	Clear	3,000	150	3 7/8
13306	25B10/DL/BL	4	24	25	Candelabra	120	Clear	3,000	150	3 7/8
13748	25B10/CRYSTAL/DL/BL	4	24	25	Candelabra	120	Crystal	3,000	150	3 7/8
13317	25B10/DL/BL	2	12	25	Candelabra	120	Frosted	3,000	145	3 7/8
13308	25B10/DL/BL	4	24	25	Candelabra	120	Frosted	3,000	145	3 7/8
13318	25B10/DL/BL	2	12	25	Medium	120	Clear	3,000	150	3 13/16
13331	25B10/DL/BL	4	24	25	Medium	120	Clear	3,000	150	3 13/16
13309	40B10/DL/BL	4	24	40	Candelabra	120	Frosted	3,000	300	3 7/8
13320	40B10/DL/BL	2	12	40	Candelabra	120	Frosted	3,000	300	3 7/8
13321	40B10/DL/BL	2	12	40	Medium	120	Clear	3,000	300	3 13/16
13322	40B10/DL/BL	2	12	40	Medium	120	Frosted	3,000	300	3 13/16
13332	40B10/DL/BL	4	24	40	Medium	120	Clear	3,000	320	3 13/16
13319	40B10/DL/BL	2	12	40	Candelabra	120	Clear	3,000	320	3 7/8
13328	40B10/DL/BL	4	24	40	Candelabra	120	Clear	3,000	320	3 7/8
13714	40B10/CRYSTAL/DL/BL	4	24	40	Candelabra	120	Crystal	3,000	320	3 7/8
13741	40B10/CRYSTAL/DL/BL	2	12	40	Candelabra	120	Crystal	3,000	320	3 7/8
13754	60B10/DL/BL	4	24	60	Candelabra	120	Frosted	3,000	545	3 7/8
13778	60B10/DL/BL	2	12	60	Candelabra	120	Frosted	3,000	545	3 7/8
13254	60B10/DL/BL	4	24	60	Medium	120	Clear	3,000	575	3 13/16
13323	60B10/DL/BL	2	12	60	Medium	120	Clear	3,000	575	3 13/16
13324	60B10/DL/BL	2	12	60	Medium	120	Frosted	3,000	545	3 13/16
13705	60B10/DL/BL	4	24	60	Candelabra	120	Clear	3,000	575	3 7/8
13777	60B10/DL/BL	2	12	60	Candelabra	120	Clear	3,000	575	3 7/8
B13 Fan										
13369	40B13/DL/FAN/BL	2	12	40	Medium	120	Clear	3,000	455	3 13/16
13370	60B13/DL/FAN/BL	2	12	60	Medium	120	Clear	3,000	650	3 13/16

Ordering Information

Item Number	Ordering Abbreviation	SKU Count	Case Count	Watts	Base	Volts	Finish	Average Rated Life (hrs.)	Lumens	MOL (in.)
R20										
14959	45R20/DL/RP	2	48	45	Medium Brass	120	Reflector	4,000	235	3 15/16
15698	45R20/DL/RP	1	6	45	Medium Brass	120	Reflector	4,000	235	3 15/16
BR30										
15177	65BR30/DL/FL/RP	1	6	65	Medium Brass	120	Reflector	4,000	485	5 3/8
15184	65BR30/DL/FL/TRAY	1	48	65	Medium Brass	120	Reflector	4,000	485	5 3/8
15266	65BR30/DL/FL/RP	2	24	65	Medium Brass	120	Reflector	4,000	485	5 3/8
15914	65BR30/DL/FL/RP	4	32	65	Medium Brass	120	Reflector	4,000	485	5 3/8
15951	65BR30/DL/FL/RP	6	24	65	Medium Brass	120	Reflector	4,000	485	5 3/8
17001	65BR30/DL/FL/RP	3	24	65	Medium Brass	120	Reflector	4,000	485	5 3/8
BR40										
15092	65BR40/DL/FL/RP	2	24	65	Medium Brass	120	Reflector	4,000	510	6 1/2
15332	65BR40/DL/FL/RP	1	6	65	Medium Brass	120	Reflector	4,000	510	6 1/2
G25										
14145	25G25/DL/RP	1	6	25	Medium	120	Clear	3,000	145	4 7/16
14146	25G25/DL/RP	1	6	25	Medium	120	Soft White	3,000	145	4 7/16
15997	25G25/DL/RP	3	24	25	Medium	120	Clear	3,000	145	4 7/16
15998	25G25/DL/RP	3	24	25	Medium	120	Soft White	3,000	145	4 7/16
14148	40G25/DL/RP	1	6	40	Medium	120	Soft White	3,000	265	4 7/16
15345	40G25/DL/RP	3	24	40	Medium	120	Soft White	3,000	265	4 7/16
14147	40G25/DL/RP	1	6	40	Medium	120	Clear	3,000	290	4 7/16
15335	40G25/DL/RP	3	24	40	Medium	120	Clear	3,000	290	4 7/16
15353	60G25/DL/RP	3	24	60	Medium	120	Soft White	3,000	460	4 7/16
14150	60G25/DL/RP	1	6	60	Medium	120	Soft White	3,000	460	4 7/16
14149	60G25/DL/RP	1	6	60	Medium	120	Clear	3,000	525	4 7/16
15352	60G25/DL/RP	3	24	60	Medium	120	Clear	3,000	525	4 7/16
A15										
11664	40A15/DL/FAN/BL	2	24	40	Medium	120	Soft White	2,000	310	3 1/2
10027	40A15/DL/FAN/BL	4	48	40	Medium	120	Clear	2,000	350	3 1/2
10034	40A15/DL/FAN/BL	2	12	40	Medium	120	Clear	2,000	350	3 1/2
10061	40A15/DL/APPL/BL	2	12	40	Medium	120	Clear	2,000	350	3 1/2
10133	40A15/DL/APPL/BL	1	12	40	Medium	120	Clear	2,000	350	3 1/2
10868	60A15/DL/FAN/BL	2	24	60	Medium	120	Soft White	2,000	510	3 1/2
10040	60A15/DL/FAN/BL	2	12	60	Medium	120	Clear	2,000	530	3 1/2
10048	60A15/DL/FAN/RP	2	24	60	Medium	120	Clear	2,000	530	3 1/2
15719	60A15/DL/FAN/BL	4	24	60	Candelabra	120	Clear	2,000	530	3 1/2
C7										
13523	4C7/DL/BL	4	48	4	Candelabra	120	Clear	6,000	10	2 1/8


Ordering Guide

40	A	/	DL	/	VERT	/	RP
Wattage	Bulb Shape		DL = Double Life		VERT = Vertical Graphics FL = Flood Lamp FAN = Vibration Service Lamp APPL = Appliance Lamp		RP = Retail Pack BL = Blister Pack


System Comparison

Lamp Product	Ordering Description	Voltage	Initial Watts	% Initial Lumens	Lumens	Life	% Life
Soft White 60W A-lamp	60A/SW	120	60	850	100%	1000	100%
Double Life 60W A-lamp	60A/DLSW	120	60	770	91%	2000	200%
130 Volt - 60W A-lamp	60A/SW	130	53	650	76%	2500	250%

Dimensions

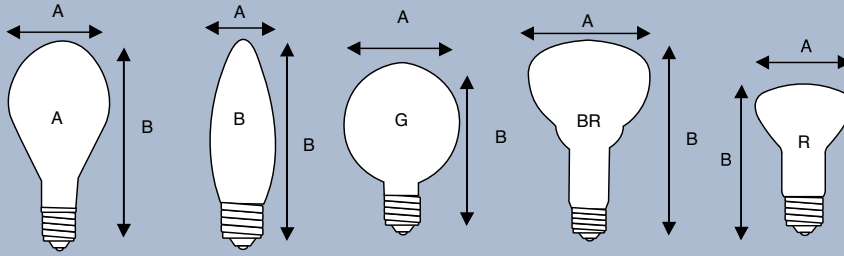


	(A) Diameter (in.)	(B) MOL (in.)
A15	1 7/8	3 1/2
A19	2 3/8	4 7/16
A21	2 5/8	5 5/16
B10 – Medium	1 1/4	3 13/16
B10 – Candelabra	1 1/4	3 7/8
B13	1 5/8	3 13/16
G25	3 1/8	4 7/16
R20	2 1/2	3 15/16
BR30	3 3/4	5 3/8
BR40	5	6 1/2
C7	7/8	2 1/8




Technical Information

Effect of Voltage Variation on the Operating Characteristics of Incandescent Lamps

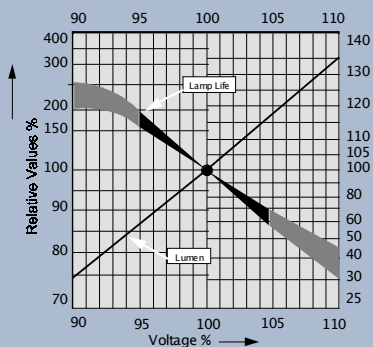

Typical Mortality Curve for Incandescent Lamps

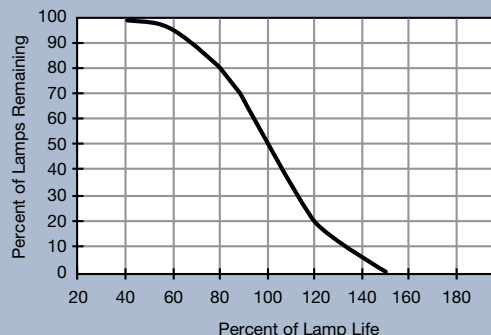

At average rated life, 50% of the lamps will fail.

Sample Specification

Lamp(s) shall be (a) SYLVANIA *DOUBLElife* lamp(s) ____ (A19, Three-Way, R20, BR30 or BR40 Reflector, A15 Ceiling Fan or Appliance, Medium or Candelabra B-shape, C7 or G25) and with a ____ (2000, 2400, 3000, 4000 or 6000) hour average rated life.

United States OSRAM SYLVANIA

100 Endicott Street
Danvers, MA 01923
1-800-LIGHTBULB

Trade

Phone: 800-255-5042
Fax: 800-255-5043

National Accounts

Phone: 800-562-4671
Fax: 800-562-4674

OEM/Special Markets

Phone: 800-762-7191
Fax: 800-762-7192

Retail

Phone: 800-842-7010
Fax: 800-842-7011

SYLVANIA Lighting Services

Phone: 800-323-0572
Fax: 800-537-0784

Display/Optic

Phone: 888-677-2627
Fax: 855-543-1043

Canada

OSRAM SYLVANIA LTD.

2001 Drew Road
Mississauga, ON L5S 1S4
1-800-LIGHTBULB

Trade

Phone: 800-263-2852
Fax: 800-667-6772

OEM/Special Markets/Display/Optic

Phone: 800-265-2852
Fax: 800-667-6772

Retail

Phone: 800-720-2852
Fax: 800-667-6772

SYLVANIA Lighting Services

Phone: 800-663-4268
Fax: 866-239-1278

Mexico

OSRAM MEXICO

Tultitlan/Edo de Mexico
Phone: 011-52-55-58-99-18-50

ENCELIUM Technologies

United States

Phone: 201-928-2400
Fax: 201-928-4028

Canada

Phone: 905-731-7678
Fax: 905-731-1401

www.sylvania.com

/sylvania

/sylvania