

U-Bolt Ground Clamp

for Pipes, Rods, Rebar, and Fence Posts

Tube O.D. Range: 0.500 - 2.375 in.


TYPE GPL

Features

- For parallel and 90° copper conductor connections to pipes, rods, rebar and fence posts
- Components made from bronze and copper alloys
- Silicone bronze hardware
- Specially designed spacer
- Range taking
- Re-usable
- UL 467 Listed for direct burial and CSA Certified

Benefits

- Efficient use and flexibility in the field
- Provides maximum conductivity
- Corrosion resistant for longevity
- Enables cable alignment and positive contact
- Minimizes inventories
- Optimizes cost and flexibility for rework applications
- Ensures a safe and reliable grounding connection

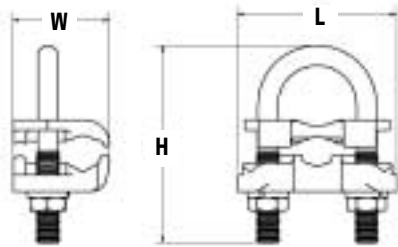

Wire perpendicular to post

Wire parallel to post

Catalog Number	Wire Range	Tube I.P.S.	Rebar	Ground Rod	O.D. Range - in. (mm)		Overall Dimensions - in. (mm)					
					Min.	Max.	W	H	L			
GPL-1	4str-8sol	1/4	#4	1/2	0.500 (12.7)	0.540 (13.7)	1.563 (39.7)	2.665 (67.7)	1.875 (47.6)			
GPL-2	2/0str-4sol	1/4	#4	1/2	0.500 (12.7)	0.540 (13.7)	1.563 (39.7)	2.665 (67.7)	1.875 (47.6)			
GPL-3	250kcmil-2/0sol	1/4	#4	1/2	0.500 (12.7)	0.540 (13.7)	1.563 (39.7)	2.665 (67.7)	1.875 (47.6)			
GPL-4	4str-8sol	3/8	#6	5/8-3/4	0.625 (15.9)	0.750 (19.1)	1.563 (39.7)	2.875 (73.0)	2.250 (57.2)			
GPL-5	2/0str-4sol	3/8	#6	5/8-3/4	0.625 (15.9)	0.750 (19.1)	1.563 (39.7)	2.875 (73.0)	2.250 (57.2)			
GPL-6	250kcmil-2/0sol	3/8	#6	5/8-3/4	0.625 (15.9)	0.750 (19.1)	1.563 (39.7)	2.875 (73.0)	2.250 (57.2)			
GPL-7	500kcmil-300kcmil	3/8	#6	5/8-3/4	0.625 (15.9)	0.750 (19.1)	1.563 (39.7)	2.875 (73.0)	2.250 (57.2)			
GPL-8	4str-8sol	1/2-3/4	#8	7/8-1	0.840 (21.3)	1.050 (26.7)	1.563 (39.7)	3.265 (82.9)	2.625 (66.7)			
GPL-9	2/0str-4sol	1/2-3/4	#8	7/8-1	0.840 (21.3)	1.050 (26.7)	1.563 (39.7)	3.265 (82.9)	2.625 (66.7)			
GPL-10	250kcmil-2/0sol	1/2-3/4	#8	7/8-1	0.840 (21.3)	1.050 (26.7)	1.563 (39.7)	3.265 (82.9)	2.625 (66.7)			
GPL-12	500kcmil-300kcmil	1/2-3/4	#8	7/8-1	0.840 (21.3)	1.050 (26.7)	1.563 (39.7)	3.265 (82.9)	2.625 (66.7)			
GPL-14	4str-8sol	1	-	1 1/8-1 1/4	1.125 (28.6)	1.310 (33.3)	1.563 (39.7)	3.540 (89.9)	2.750 (69.9)			
GPL-15	2/0str-4sol	1	-	1 1/8-1 1/4	1.125 (28.6)	1.310 (33.3)	1.563 (39.7)	3.540 (89.9)	2.750 (69.9)			
GPL-16	250kcmil-2/0sol	1	-	1 1/8-1 1/4	1.125 (28.6)	1.310 (33.3)	1.563 (39.7)	3.540 (89.9)	2.750 (69.9)			
GPL-17	500kcmil-300kcmil	1	-	1 1/8-1 1/4	1.125 (28.6)	1.310 (33.3)	1.563 (39.7)	3.540 (89.9)	2.750 (69.9)			
GPL-20	4str-8sol	1 1/4	-	1 3/8-1 1/2	1.375 (34.9)	1.660 (42.2)	1.563 (39.7)	3.665 (93.1)	3.000 (76.2)			
GPL-21	2/0str-4sol	1 1/4	-	1 3/8-1 1/2	1.375 (34.9)	1.660 (42.2)	1.563 (39.7)	3.665 (93.1)	3.000 (76.2)			
GPL-22	250kcmil-2/0sol	1 1/4	-	1 3/8-1 1/2	1.375 (34.9)	1.660 (42.2)	1.563 (39.7)	3.665 (93.1)	3.000 (76.2)			
GPL-23	500kcmil-300kcmil	1 1/4	-	1 3/8-1 1/2	1.375 (34.9)	1.660 (42.2)	1.563 (39.7)	3.665 (93.1)	3.000 (76.2)			
GPL-26	4str-8sol	1 1/2	-	1 5/8-1 7/8	1.625 (41.3)	1.900 (48.3)	1.563 (39.7)	4.165 (105.8)	3.250 (82.6)			
GPL-27	2/0str-4sol	1 1/2	-	1 5/8-1 7/8	1.625 (41.3)	1.900 (48.3)	1.563 (39.7)	4.165 (105.8)	3.250 (82.6)			
GPL-28	250kcmil-2/0sol	1 1/2	-	1 5/8-1 7/8	1.625 (41.3)	1.900 (48.3)	1.563 (39.7)	4.165 (105.8)	3.250 (82.6)			
GPL-29	500kcmil-300kcmil	1 1/2	-	1 5/8-1 7/8	1.625 (41.3)	1.900 (48.3)	1.563 (39.7)	4.165 (105.8)	3.250 (82.6)			
GPL-32	4str-8sol	2	-	2-2 3/8	2.000 (50.8)	2.375 (60.3)	1.563 (39.7)	4.665 (118.5)	3.625 (92.1)			
GPL-33	2/0str-4sol	2	-	2-2 3/8	2.000 (50.8)	2.375 (60.3)	1.563 (39.7)	4.665 (118.5)	3.625 (92.1)			
GPL-34	250kcmil-2/0sol	2	-	2-2 3/8	2.000 (50.8)	2.375 (60.3)	1.563 (39.7)	4.665 (118.5)	3.625 (92.1)			
GPL-35	500kcmil-300kcmil	2	-	2-2 3/8	2.000 (50.8)	2.375 (60.3)	1.563 (39.7)	4.665 (118.5)	3.625 (92.1)			

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)
 Tested to UL 467, UL File E34440