

# U-Bolt Ground Clamp

## for Pipes, Rods, Rebar, and Fence Posts

### Tube O.D. Range: 2.500 - 6.500 in.



## TYPE GPL

### Features

- For parallel and 90° copper conductor connections to pipes, rods, rebar and fence posts
- Components made from bronze and copper alloys
- Silicone bronze hardware
- Specially designed spacer
- Range taking
- Re-usable
- UL 467 Listed for direct burial and CSA Certified

### Benefits

- Efficient use and flexibility in the field
- Provides maximum conductivity
- Corrosion resistant for longevity
- Enables cable alignment and positive contact
- Minimizes inventories
- Optimizes cost and flexibility for rework applications
- Ensures a safe and reliable grounding connection

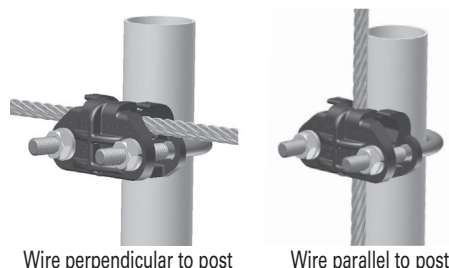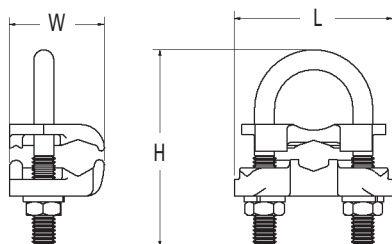

| Catalog Number | Wire Range        | Tube I.P.S. | Rebar | Ground Rod  | O.D. Range - in. (mm) |               | Overall Dimensions - in. (mm) |               |               |
|----------------|-------------------|-------------|-------|-------------|-----------------------|---------------|-------------------------------|---------------|---------------|
|                |                   |             |       |             | Min.                  | Max.          | W                             | H             | L             |
| GPL-38         | 4str-8sol         | 2 1/2       | -     | 2 1/2-2 7/8 | 2.500 (63.5)          | 2.875 (73.0)  | 1.600 (40.6)                  | 5.165 (131.2) | 4.250 (108.0) |
| GPL-39         | 2/0str-4sol       | 2 1/2       | -     | 2 1/2-2 7/8 | 2.500 (63.5)          | 2.875 (73.0)  | 1.600 (40.6)                  | 5.165 (131.2) | 4.250 (108.0) |
| GPL-40         | 250kcmil-2/0sol   | 2 1/2       | -     | 2 1/2-2 7/8 | 2.500 (63.5)          | 2.875 (73.0)  | 1.600 (40.6)                  | 5.165 (131.2) | 4.250 (108.0) |
| GPL-41         | 500kcmil-300kcmil | 2 1/2       | -     | 2 1/2-2 7/8 | 2.500 (63.5)          | 2.875 (73.0)  | 1.600 (40.6)                  | 5.165 (131.2) | 4.250 (108.0) |
| GPL-44         | 4str-8sol         | 3           | -     | 3-3 1/2     | 3.000 (76.2)          | 3.500 (88.9)  | 1.600 (40.6)                  | 5.790 (147.1) | 4.750 (120.7) |
| GPL-45         | 2/0str-4sol       | 3           | -     | 3-3 1/2     | 3.000 (76.2)          | 3.500 (88.9)  | 1.600 (40.6)                  | 5.790 (147.1) | 4.750 (120.7) |
| GPL-46         | 250kcmil-2/0sol   | 3           | -     | 3-3 1/2     | 3.000 (76.2)          | 3.500 (88.9)  | 1.600 (40.6)                  | 5.790 (147.1) | 4.750 (120.7) |
| GPL-47         | 500kcmil-300kcmil | 3           | -     | 3-3 1/2     | 3.000 (76.2)          | 3.500 (88.9)  | 1.600 (40.6)                  | 5.790 (147.1) | 4.750 (120.7) |
| GPL-50         | 4str-8sol         | 3 1/2       | -     | 3 1/2-4     | 3.500 (88.9)          | 4.000 (101.6) | 1.600 (40.6)                  | 6.790 (172.5) | 5.250 (133.4) |
| GPL-51         | 2/0str-4sol       | 3 1/2       | -     | 3 1/2-4     | 3.500 (88.9)          | 4.000 (101.6) | 1.600 (40.6)                  | 6.790 (172.5) | 5.250 (133.4) |
| GPL-52         | 250kcmil-2/0sol   | 3 1/2       | -     | 3 1/2-4     | 3.500 (88.9)          | 4.000 (101.6) | 1.600 (40.6)                  | 6.790 (172.5) | 5.250 (133.4) |
| GPL-53         | 500kcmil-300kcmil | 3 1/2       | -     | 3 1/2-4     | 3.500 (88.9)          | 4.000 (101.6) | 1.600 (40.6)                  | 6.790 (172.5) | 5.250 (133.4) |
| GPL-56         | 4str-8sol         | 4           | -     | 4-4 1/2     | 4.000 (101.6)         | 4.500 (114.3) | 1.600 (40.6)                  | 7.040 (178.8) | 5.875 (149.2) |
| GPL-57         | 2/0str-4sol       | 4           | -     | 4-4 1/2     | 4.000 (101.6)         | 4.500 (114.3) | 1.600 (40.6)                  | 7.040 (178.8) | 5.875 (149.2) |
| GPL-58         | 250kcmil-2/0sol   | 4           | -     | 4-4 1/2     | 4.000 (101.6)         | 4.500 (114.3) | 1.600 (40.6)                  | 7.040 (178.8) | 5.875 (149.2) |
| GPL-59         | 500kcmil-300kcmil | 4           | -     | 4-4 1/2     | 4.000 (101.6)         | 4.500 (114.3) | 1.600 (40.6)                  | 7.040 (178.8) | 5.875 (149.2) |
| GPL-68         | 4str-8sol         | 5           | -     | 5-5 1/2     | 5.000 (127.0)         | 5.500 (139.7) | 1.563 (39.7)                  | 8.665 (220.1) | 7.000 (177.8) |
| GPL-69         | 2/0str-4sol       | 5           | -     | 5-5 1/2     | 5.000 (127.0)         | 5.500 (139.7) | 1.563 (39.7)                  | 8.665 (220.1) | 7.000 (177.8) |
| GPL-70         | 250kcmil-2/0sol   | 5           | -     | 5-5 1/2     | 5.000 (127.0)         | 5.500 (139.7) | 1.563 (39.7)                  | 8.665 (220.1) | 7.000 (177.8) |
| GPL-71         | 500kcmil-300kcmil | 5           | -     | 5-5 1/2     | 5.000 (127.0)         | 5.500 (139.7) | 1.563 (39.7)                  | 8.665 (220.1) | 7.000 (177.8) |
| GPL-75         | 2/0str-4sol       | 6           | -     | 6-6 1/2     | 6.000 (152.4)         | 6.500 (165.1) | 1.563 (39.7)                  | 9.165 (232.8) | 8.000 (203.2) |
| GPL-76         | 250kcmil-2/0sol   | 6           | -     | 6-6 1/2     | 6.000 (152.4)         | 6.500 (165.1) | 1.563 (39.7)                  | 9.165 (232.8) | 8.000 (203.2) |
| GPL-77         | 500kcmil-300kcmil | 6           | -     | 6-6 1/2     | 6.000 (152.4)         | 6.500 (165.1) | 1.563 (39.7)                  | 9.165 (232.8) | 8.000 (203.2) |

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)

Tested to UL 467, UL File E34440