
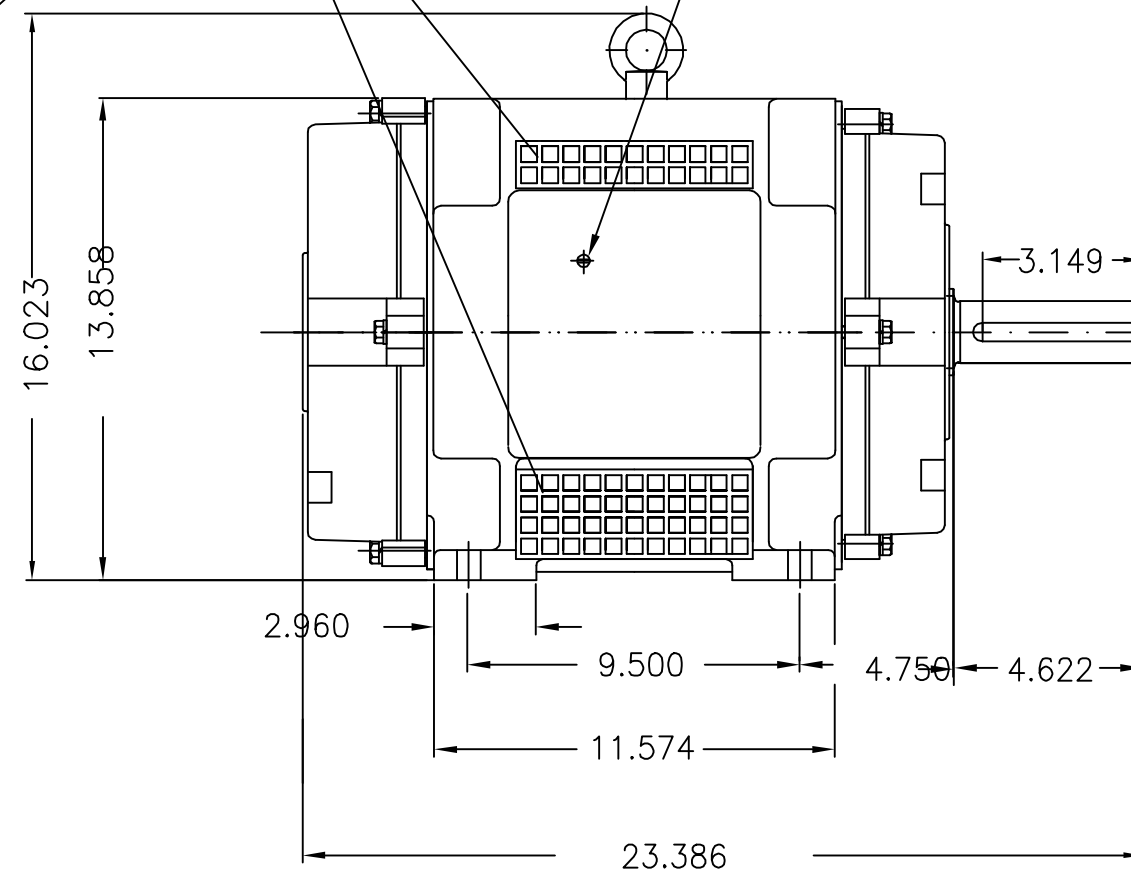


EIXO	
PADRÃO	X
OPCIONAL	
ESPECIAL	

Tela de protecao / Screen protetion

Grounding for leads 5.2–25 mm²

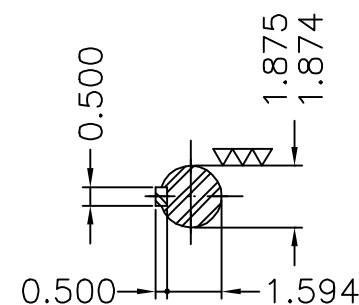

Carcaca especial / Special frame												
Isolamento classe F (Dt=80K) / Class F insulation – 80K temperature rise												
Categoria D / Design D												
Fator de Serviço 1.00 / Service factor 1.00												
Forma Construtiva B3E / Mounting – B3L(E)												
WEX889		---		ALT. FATOR DE SERVIÇO 1.00 ERA 1.15		KLEIN		CASSIO		16.06.03	01	
RLM		LOC		ENGINEERING CHANGES		DRAWN		REVIEWED		RELEASED	DATE	IND
DRAWN		ADRIANAP										
REVIEWED		<i>Rudi</i>										
RELEASED				CUSTOMER								
DATE		11/2/2003		WEG ELECTRIC MOTORS CORP.								SCALE: %
THREE PHASE OIL WELL PUMP. MOTOR								E4007743		PI		
FRAME 284T IP23												