


1 2 3 4 5 6


A

B

C

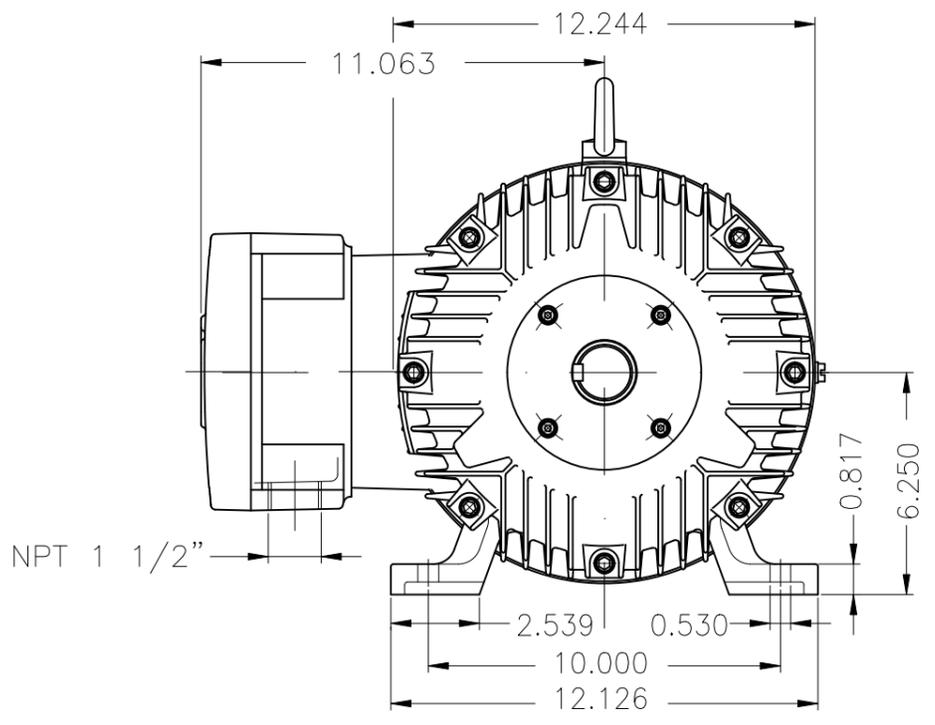


Grounding for leads 5.2-25 mm² / 10-4 AWG

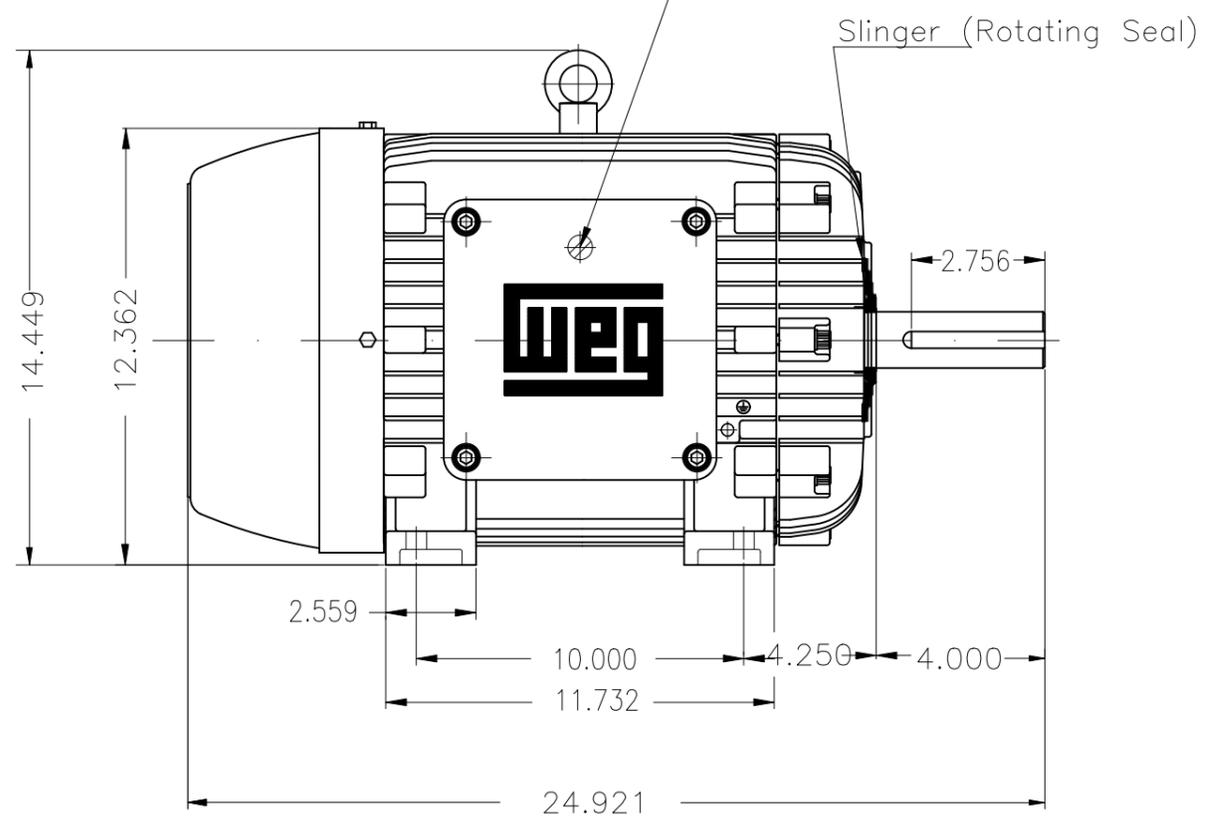

D

E

With grease fitting
Color RAL 5009
Painting plan 222P
Mounting NEMA F-1
Mounting B3R(D)



10 HP 06 Poles 60 Hz A

ECM	LOC	SUMMARY OF MODIFICATIONS	HYBRISUSER	EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	HYBRISUSER	THREE PH. MOTOR EXPLOSION PROOF NEMA PREM. EFF.						00
CHECKED		FRAME 256T IP55 TEFC						
RELEASED								
REL. DATE	WMO	Jaragua do Sul	Product Engineering	SHEET	1 / 1			

PREVIEW

WDD 00

