

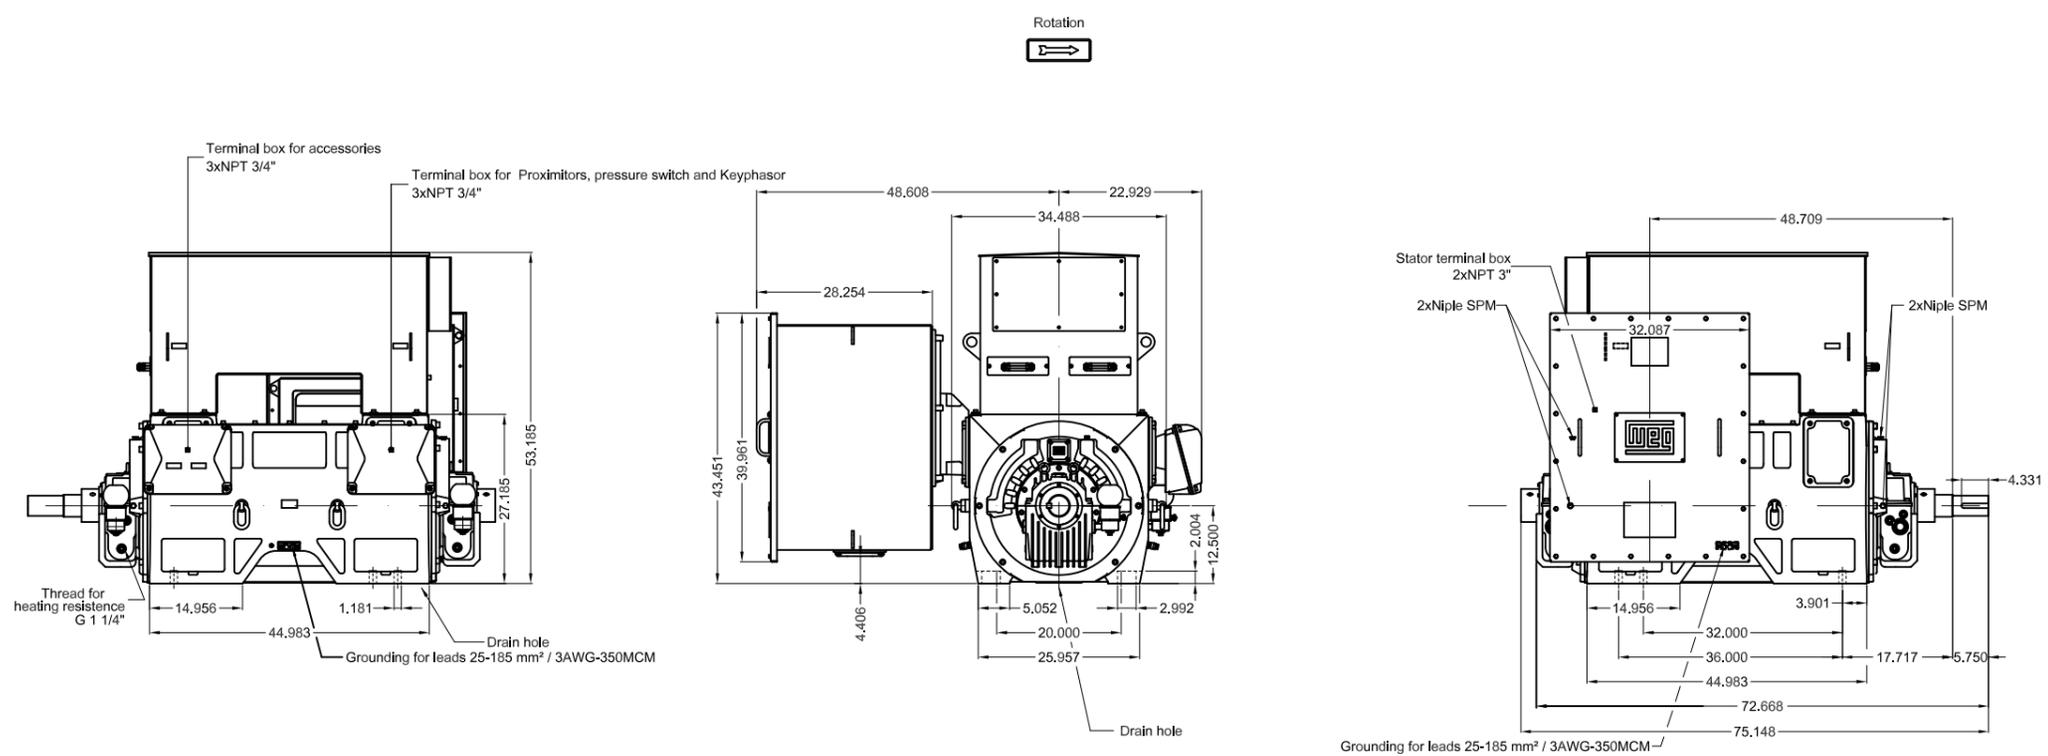



A  
B  
C  
D  
E  
F  
G  
H



- With two sets of nameplates, of motor with certification logo and one supplied loose and without certification logo
- Connection cables 2000+100mm length from terminal box
- NDE balancing disc
- Connection cables coiled inside the main terminal box
- Nameplate of the accessory terminal box
- Terminal with 13 mm diameter hole for connection bolt
- Designed for keyphasor on DE bearing
- DE and NDE sleeve bearings designed for space heaters
- Tightening torque of cover screws and bearings = 69Nm
- Designed for Proximitor sensor on bearings (2 per bearing)
- NDE Sleeve Bearing - electrically insulated
- Finish color Munsell 2.5 YR 6/14 inside of terminal box
- Stainless steel screws - AISI 316
- Provision for pressure switch sensor
- 304 stainless steel filter on air inlet
- Bearings with glass Trico Oilers
- Frame designed for dowel pins
- Main terminal box with space heaters
- Color RAL 5009
- Painting plan 212P
- Mounting NEMA F-1
- Position of the stator terminal box can be changed (right / left)
- Mounting B3R(D)



1000 HP 02 Poles 60 Hz 2300/4000 V		WEC HOUSE ACCOUNT ENERGY				A
		ALTERADO CONF. PCR 100000195510				1:20
		REMOVE NOTE				
ECM	LOC	SUMMARY OF MODIFICATIONS		EXECUTED	CHECKED	RELEASED
EXECUTED	DOGE	THREE PH. MOTOR W60 HAZARDOUS AREA		1276022164	WDD 11	
CHECKED	LUCASH	FRAME 5010/11 IP24 ODP WP II		11.08.2023		10
RELEASED	LUCASH			17.06.2022		
REL. DATE	17.06.2022	WMO	Jaragua do Sul	Product Engineering	SHEET 1 / 1	

Dimensions in inches

CERTIFIED WEG MOTORES - Certified document. Not subject to changes.