


- Main terminal box can be rotated in 90° steps
- Connection cables 2000+100mm length from terminal box
- With jacking screws
- With two sets of nameplates/label, one supplied loose
- Rotation CW and CCW
- Connection cables coiled inside the main terminal box
- With three nameplates supplied loose, two according to data from auxiliary FDs
- Rotor balanced in three planes
- Space heaters 110 to 127 V
- Terminal with 13 mm diameter hole for connection bolt
- NDE Sleeve Bearing - electrically insulated
- Vibration grade according to API 541/547
- Stainless steel screws - AISI 316
- Provision for pressure switch sensor
- 304 stainless steel filter on air inlet
- Triple grounding
- Designed for 2 Bentley Nevada proximitor sensors per bearing and 1 Keyphasor on DE bearing
- Bearings with glass Trico Oilers
- Frame designed for dowel pins
- Stainless steel threaded drain
- SPM studs
- Main terminal box with space heaters
- DE and NDE sleeve bearings designed for space heaters
- Color RAL 5009
- Painting plan 212P
- Position of the stator terminal box can be changed (right / left)
- Mounting B3R(D)

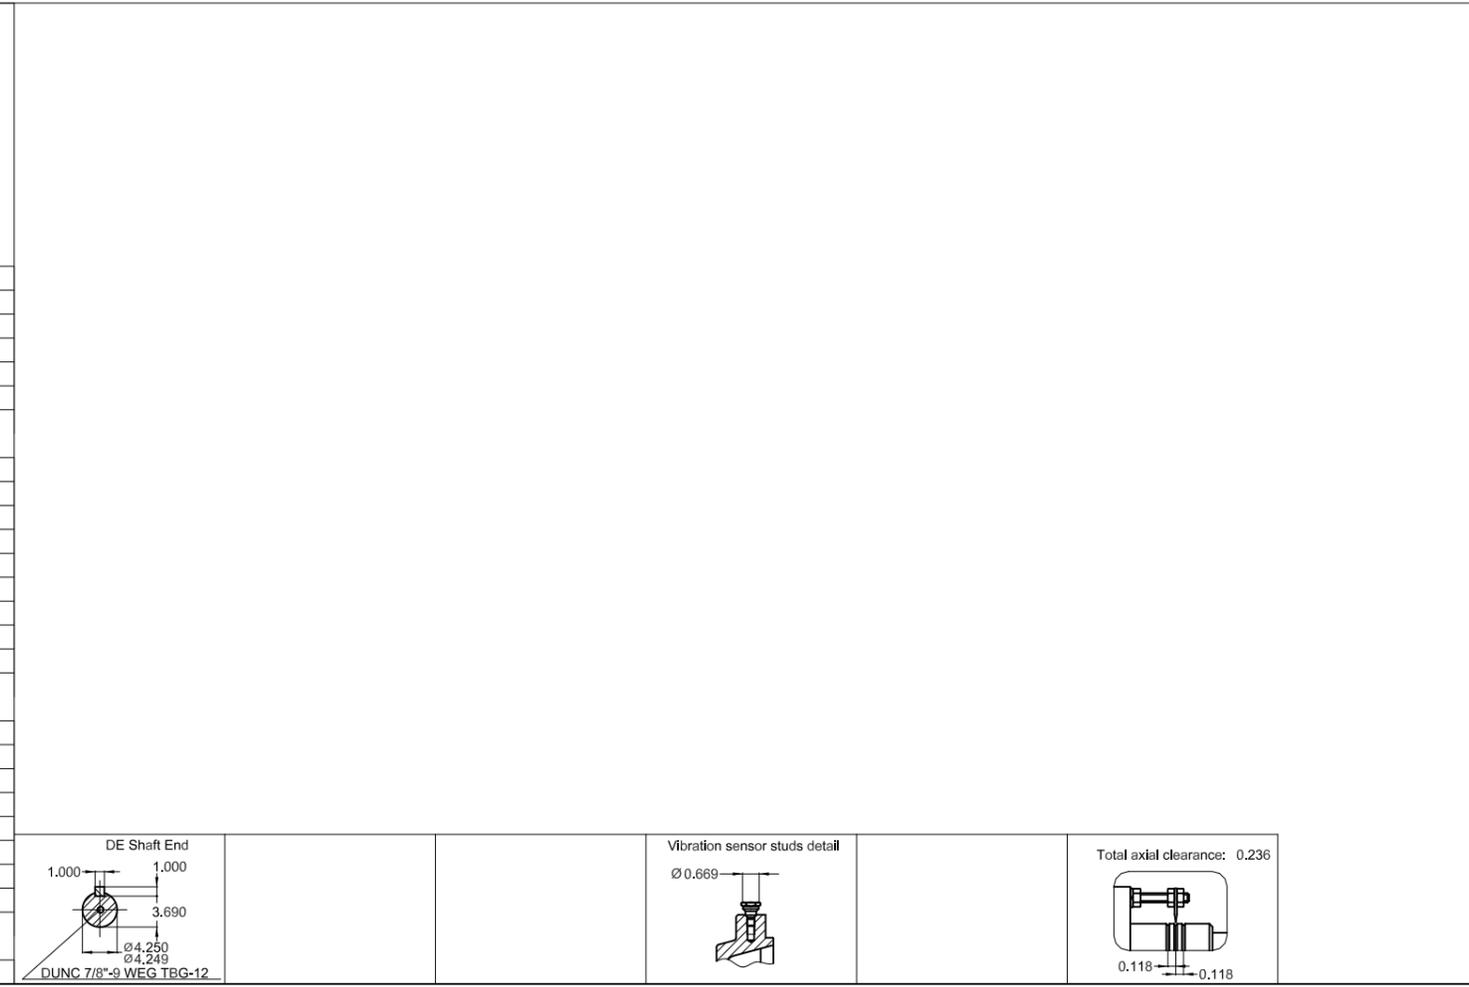

2250 HP 04 Poles 60 Hz 2300/4000 V							A	
							1:25	
ALTERADO CONFORME PCR - 100000188901				GABRIELID	SANDRESSA	SANDRESSA	18.01.2024	07
ALTERADO CONFORME PCR - 100000183125				JOHNLENONN	PAOLLA	PAOLLA	13.06.2023	06
ECM	LOC	SUMMARY OF MODIFICATIONS		EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	DOGE	THREE PH. MOTOR W60 HAZARDOUS AREA						
CHECKED	SCARMAGNANI	FRAME 6810/11 IP24 ODP WP II						
RELEASED	GCASTRO							
REL. DATE	07.06.2021	WMO	Jaragua do Sul	Product Engineering				
				1196881773				
				WDD 07				
				SHEET		1 / 1		