


- Main terminal box can be rotated in 90° steps
- With two sets of nameplates, of motor with certification logo and one supplied loose and without certification logo
- Connection cables 2000+100mm length from terminal box
- With two sets of nameplates/label, one supplied loose
- NDE balancing disc
- Connection cables coiled inside the main terminal box
- Nameplate of the accessory terminal box
- Terminal with 13 mm diameter hole for connection bolt
- Designed for keyphasor on DE bearing
- DE and NDE sleeve bearings designed for space heaters
- Axial clearance ± 3 mm
- Tightening torque of cover screws and bearings = 69Nm
- Designed for Proximitor sensor on bearings (2 per bearing)
- Finish color Munsell 2.5 YR 6/14 inside of terminal box
- Vibration grade according to API 541/547
- Stainless steel screws - AISI 316
- Provision for pressure switch sensor
- 304 stainless steel filter on air inlet
- Bearings with glass Trico Oilers
- Frame designed for dowel pins
- Main terminal box with space heaters
- Color RAL 5009
- Painting plan 212P
- Mounting NEMA F-1
- Position of the stator terminal box can be changed (right / left)
- Mounting B3R(D)

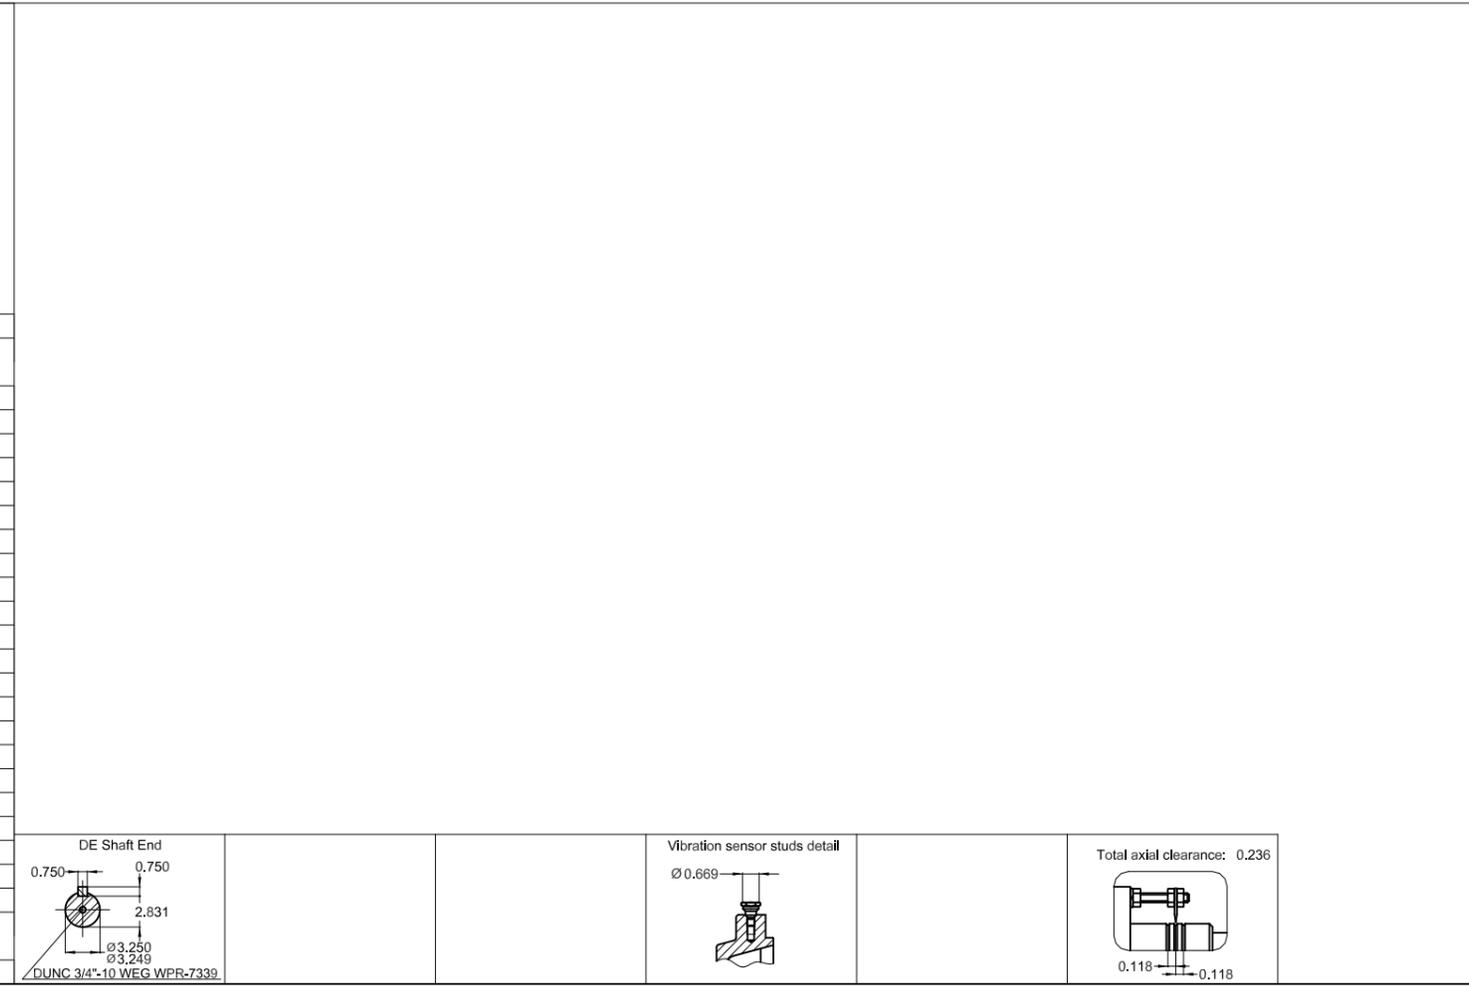

1000 HP 02 Poles 60 Hz 2300/4000 V										A
WEG HOUSE ACCOUNT ENERGY										
										1:20
ALT. CONF. PCR 100000195510					GABRIELID	NARDELLI	NARDELLI	17.10.2023	05	
CORRIGIDO NOTAS					DWAGNER	BONA	BONA	30.06.2023	04	
ECM	LOC	SUMMARY OF MODIFICATIONS			EXECUTED	CHECKED	RELEASED	DATE	VER	
EXECUTED	LUCASH	THREE PH. MOTOR W60 HAZARDOUS AREA								
CHECKED	TBAZZANELLA	FRAME 5010/11 IP24 ODP WP II								
RELEASED	TBAZZANELLA									
REL. DATE	12.09.2022	WMO	Jaragua do Sul	Product Engineering						
							1306116861	WDD	05	
							SHEET	1 / 1		