

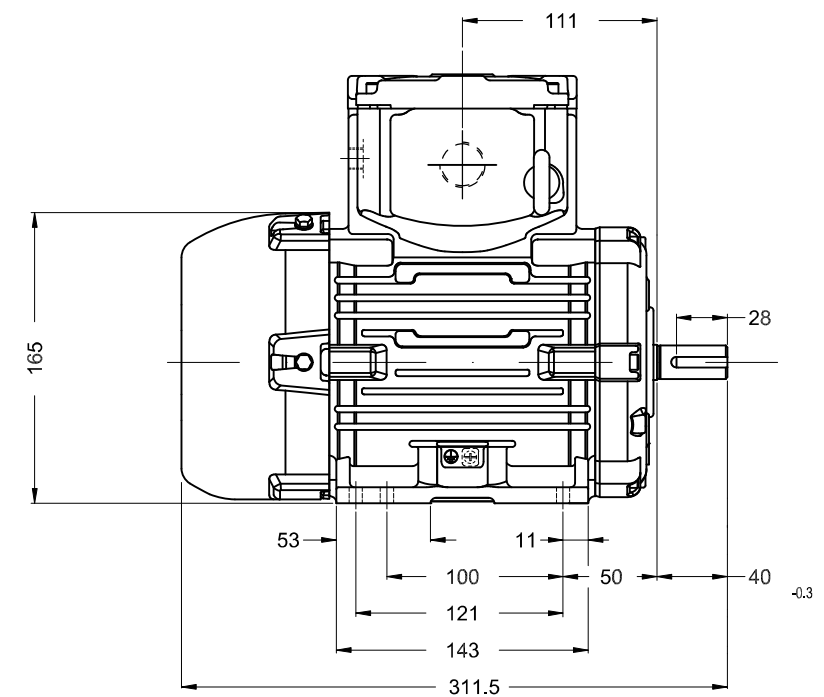


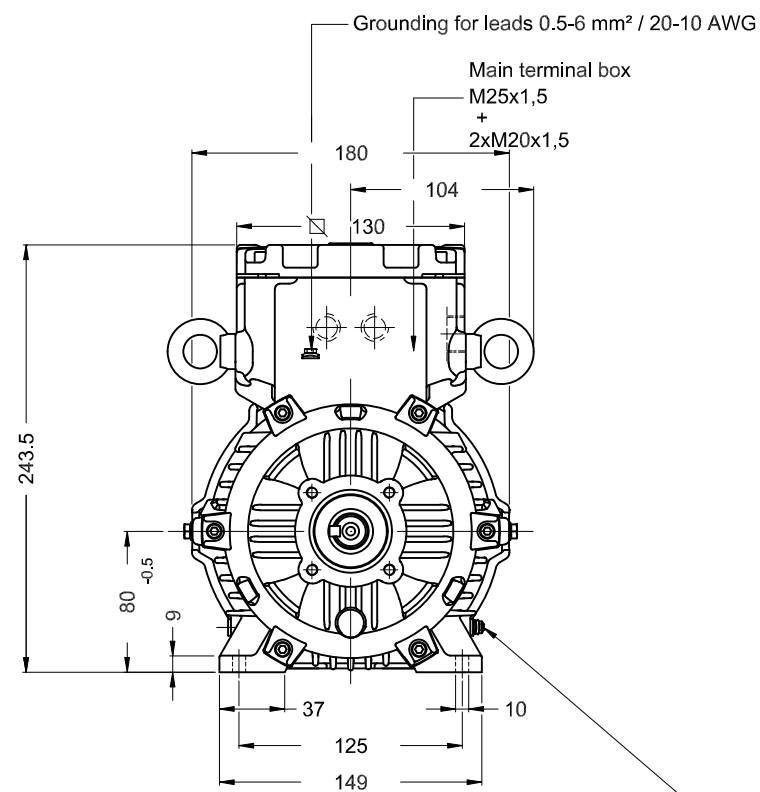

Grounding for leads 0.5-6 mm² / 20-10 AWG



0.55 kW 04 Poles 50 Hz										A
							HYBRISUSER			00
ECM	LOC	SUMMARY OF MODIFICATIONS				EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	HYBRISUSER		THREE PH. MOTOR W22Xdb 1E2 FRAME 80 IP56 TEFC				PREVIEW WDD 00			
CHECKED										
RELEASED										
REL. DATE		WMO	Jaraguá do Sul		Product Engineering		SHEET	1 / 1		