



REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	RELEASED	6/5/2008	

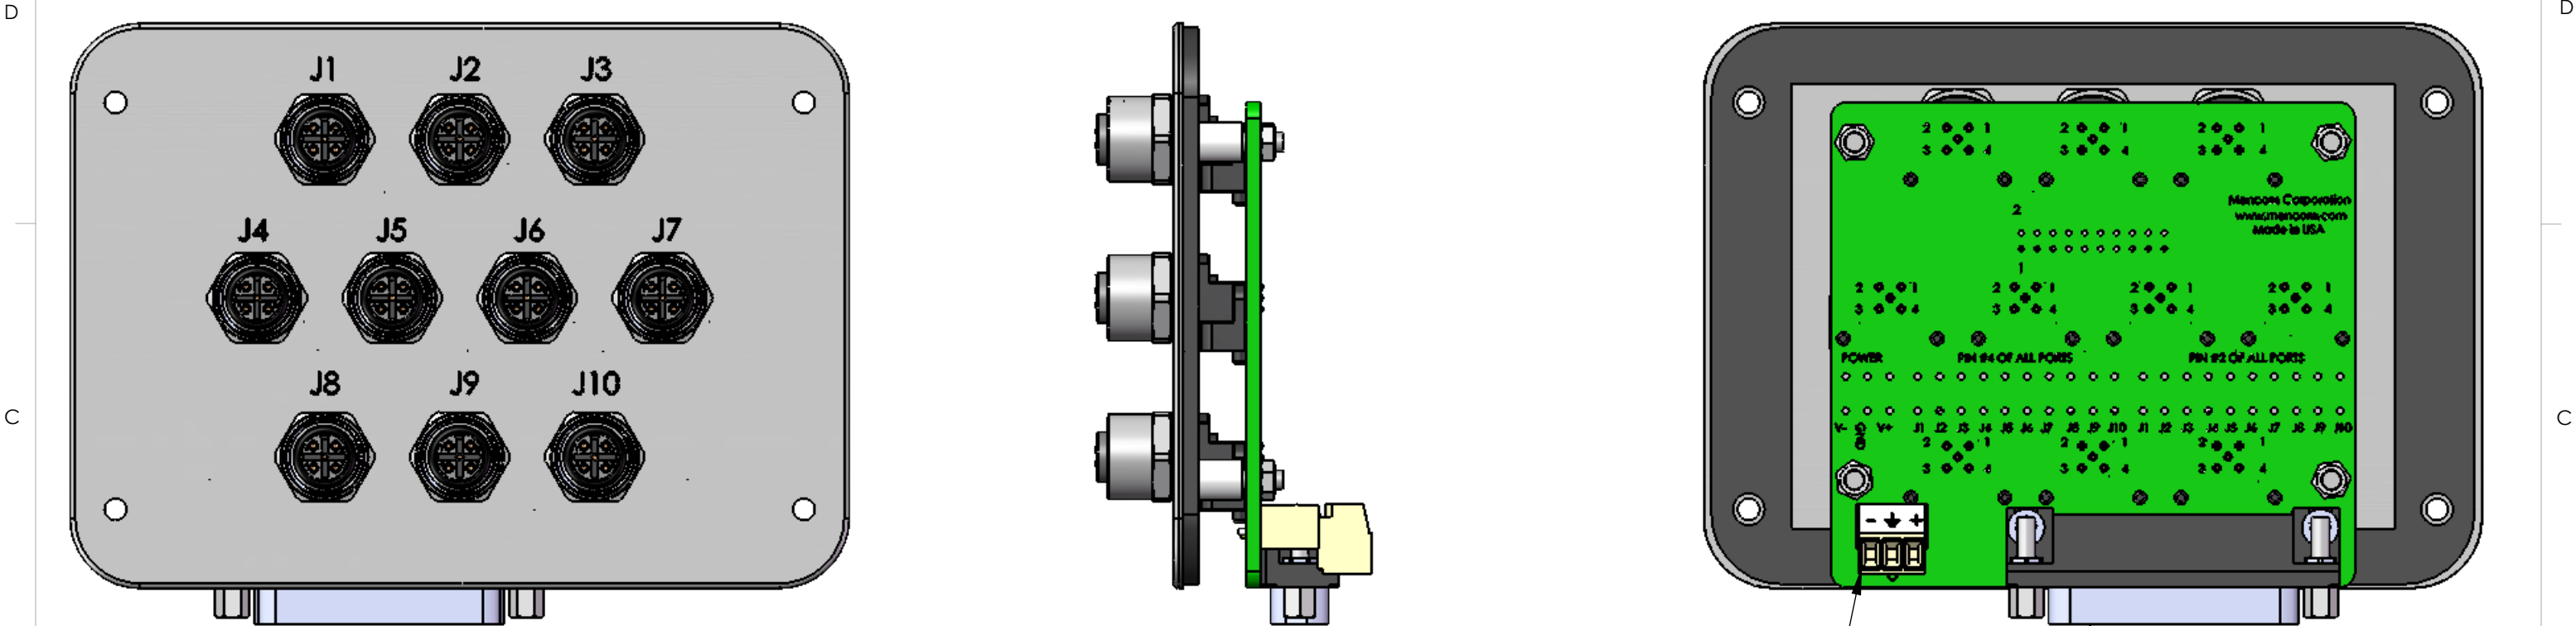

WIRING			
PORT #	PIN #	DB25 PIN #	3 PIN PLUGGABLE PIN #
ALL PORTS	1	23 & 24	V+
ALL PORTS	3	21 & 22	V-
ALL PORTS	5	25	GND
J1	4	1	
J1	2	2	
J2	4	3	
J2	2	4	
J3	4	5	
J3	2	6	
J4	4	7	
J4	2	8	
J5	4	9	
J5	2	10	
J6	4	11	
J6	2	12	
J7	4	13	
J7	2	14	
J8	4	15	
J8	2	16	
J9	4	17	
J9	2	18	
J10	4	19	
J10	2	20	

PANEL CUTOUT

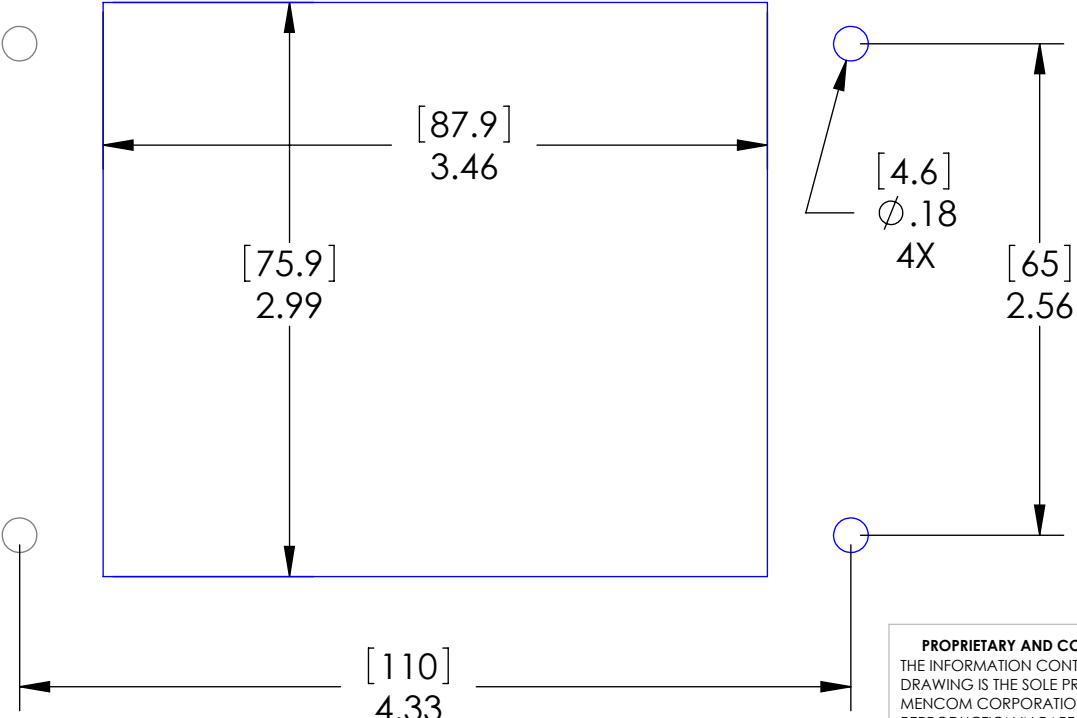

3 Pin pluggable power connector (for alternative to DB25 pins 21 - 25)

25 Pin D-Subminiature male connector

MATERIALS:  
PLATE: STAINLESS STEEL  
GASKET: NBR

UNLESS OTHERWISE SPECIFIED:		NAME	MENCOM CORPORATION	
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	DWM	TITLE:	
	CHECKED			
	ENG APPR.			
	MFG APPR.			
	Q.A.			
MATERIAL	COMMENTS:		SIZE	DWG. NO.
FINISH			<b>B</b>	D32-10MDC-DB25
DO NOT SCALE DRAWING		SCALE: 1:1	WEIGHT:	SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.