




Panel Interface Connectors

10 - 5 Conductor JDC (M12) Panel Mount Junction Bocks




Size 32 | 3 Pin Pluggable Power Connector | 25 Pin D-Sub | 300 Volt, 3 amps



Female Faceview	# of Poles	Rating	Part Number
 M12x1	5	300V 3A	D32-10MDC-DB25

Custom Options available, please consult the factory.

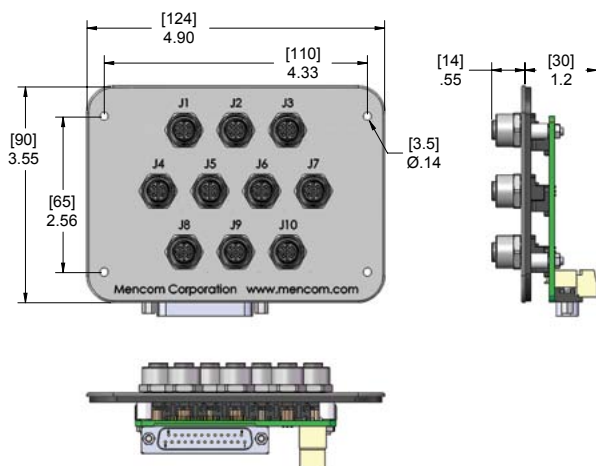

10 - 5 Pin Female MDC Receptacles

3 Pin pluggable power connector
(for alternative to DB25 pins 21 - 25)

25 Pin D-Sub male connector

Specifications:

Ratings: 3 A per Connector
8 A per Block
Plate: Stainless Steel
Inserts: Polyamide
Coupling Nuts: Nickel Plated Brass
O-Ring: BUNA-N
Contacts: Copper Alloy with Gold Plating
Gasket: Closed Cell PVC/NBR

Wiring			
Port #	PIN #	DB25 PIN #	3 PIN Pluggable PIN #
ALL PORTS	1	23 & 24	V+
ALL PORTS	3	21 & 22	V-
ALL PORTS	5	25	Ground
J1	4	1	
J1	2	2	
J2	4	3	
J2	2	4	
J3	4	5	
J3	2	6	
J4	4	7	
J4	2	8	
J5	4	9	
J5	2	10	
J6	4	11	
J6	2	12	
J7	4	13	
J7	2	14	
J8	4	15	
J8	2	16	
J9	4	17	
J9	2	18	
J10	4	19	
J10	2	20	