


— AUSTRALIA, NEW ZEALAND 15A-250V TYPE I OUTLET  
AS/NZS 3112, AS/NZS 4417, (AU2-15R)  
NOTE: OUTLET ACCEPTS 10A and 15A  
AUSTRALIAN / NEW ZEALAND PLUGS

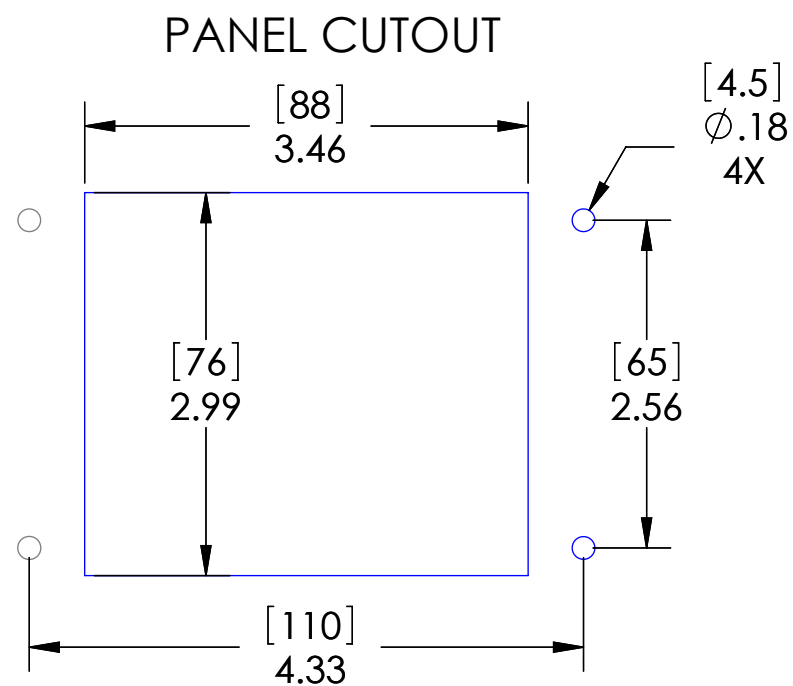

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

HOUSING MATERIALS	
BODY:	EPOXY COATED DIE CAST ALUMINUM
GASKET:	THERMOPLASTIC ELASTOMER
HANDLE:	POLYAMIDE
LEVERS:	STAINLESS STEEL

PIC RATINGS/SPECIFICATIONS	
VOLTS:	250V
AMPS:	5A
NEMA/UL   EN 60529:	4, 4X, 12   IP65
MOUNTING SCREW SIZE:	M4 (8-32) (304 or 316SS for 4X)
MOUNTING SCREW TORQUE:	1.2~1.8N-m (0.9~1.3 Lb-Ft)
INCOMING POWER WIRE SIZE:	0.5 ~ 4.0 sq mm / 20-12AWG
WIRE STRIP LENGTH:	10 ~ 11 mm

OPERATING TEMPERATURE: (-5°C / +50° C (+23° F / +122° F ))

MOUNTING KIT ORDERED  
SEPARATELY CONTAINS  
M4x0.7 SS SCREW, NYLON WASHER,  
SPLIT LOCKWASHER AND M4 NUT  
**P/N: D-PIC-MT**

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES  
AND [MM]

	MATERIAL
--	----------

	FINISH
--	--------

DO NOT SCALE DRAWING

DRAWN BY	APR
DRAWN DATE	07/13/2021
CHECKED BY	DCG
CHECK DATE	07/16/2021

COMMENTS:

MENCOM CORPORATION

TITLE:

AUS 15A RCPT, RJ45, 5AMP; 32

SIZE	DWG. NO.	REV
------	----------	-----

<b>B</b>	DAS-RJ45-5R-32	<b>B</b>
----------	----------------	----------

SCALE: 2:3	WEIGHT:	SHEET 1 OF 1
------------	---------	--------------

STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED		
CONN. TYPE	EXTERIOR	INTERIOR
RJ45	CAT. 6 JACK	CAT. 6 JACK

**PROPRIETARY AND CONFIDENTIAL**

THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
MENCOM CORPORATION. ANY  
REPRODUCTION IN PART OR AS A WHOLE  
WITHOUT THE WRITTEN PERMISSION OF  
MENCOM CORPORATION IS  
PROHIBITED.

SCALE: 2:3	WEIGHT:	SHEET 1 OF 1
------------	---------	--------------