


WIRING		
MCV	PORT/PIN	FUNCTION
19	ALL PORTS PIN 1	V+
12	GND	GND
6	ALL PORTS PIN 3	V-
15	PORT 1 PIN 4	I/O
5	PORT 2 PIN 4	I/O
16	PORT 3 PIN 4	I/O
3	PORT 4 PIN 4	I/O
17	PORT 5 PIN 4	I/O
2	PORT 6 PIN4	I/O
11	PORT 7 PIN 4	I/O
1	PORT 8 PIN 4	I/O
7	PORT 9 PIN 4	I/O
4	PORT 10 PIN 4	I/O

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	DRAWN IN SW	12/10/2012	DCT

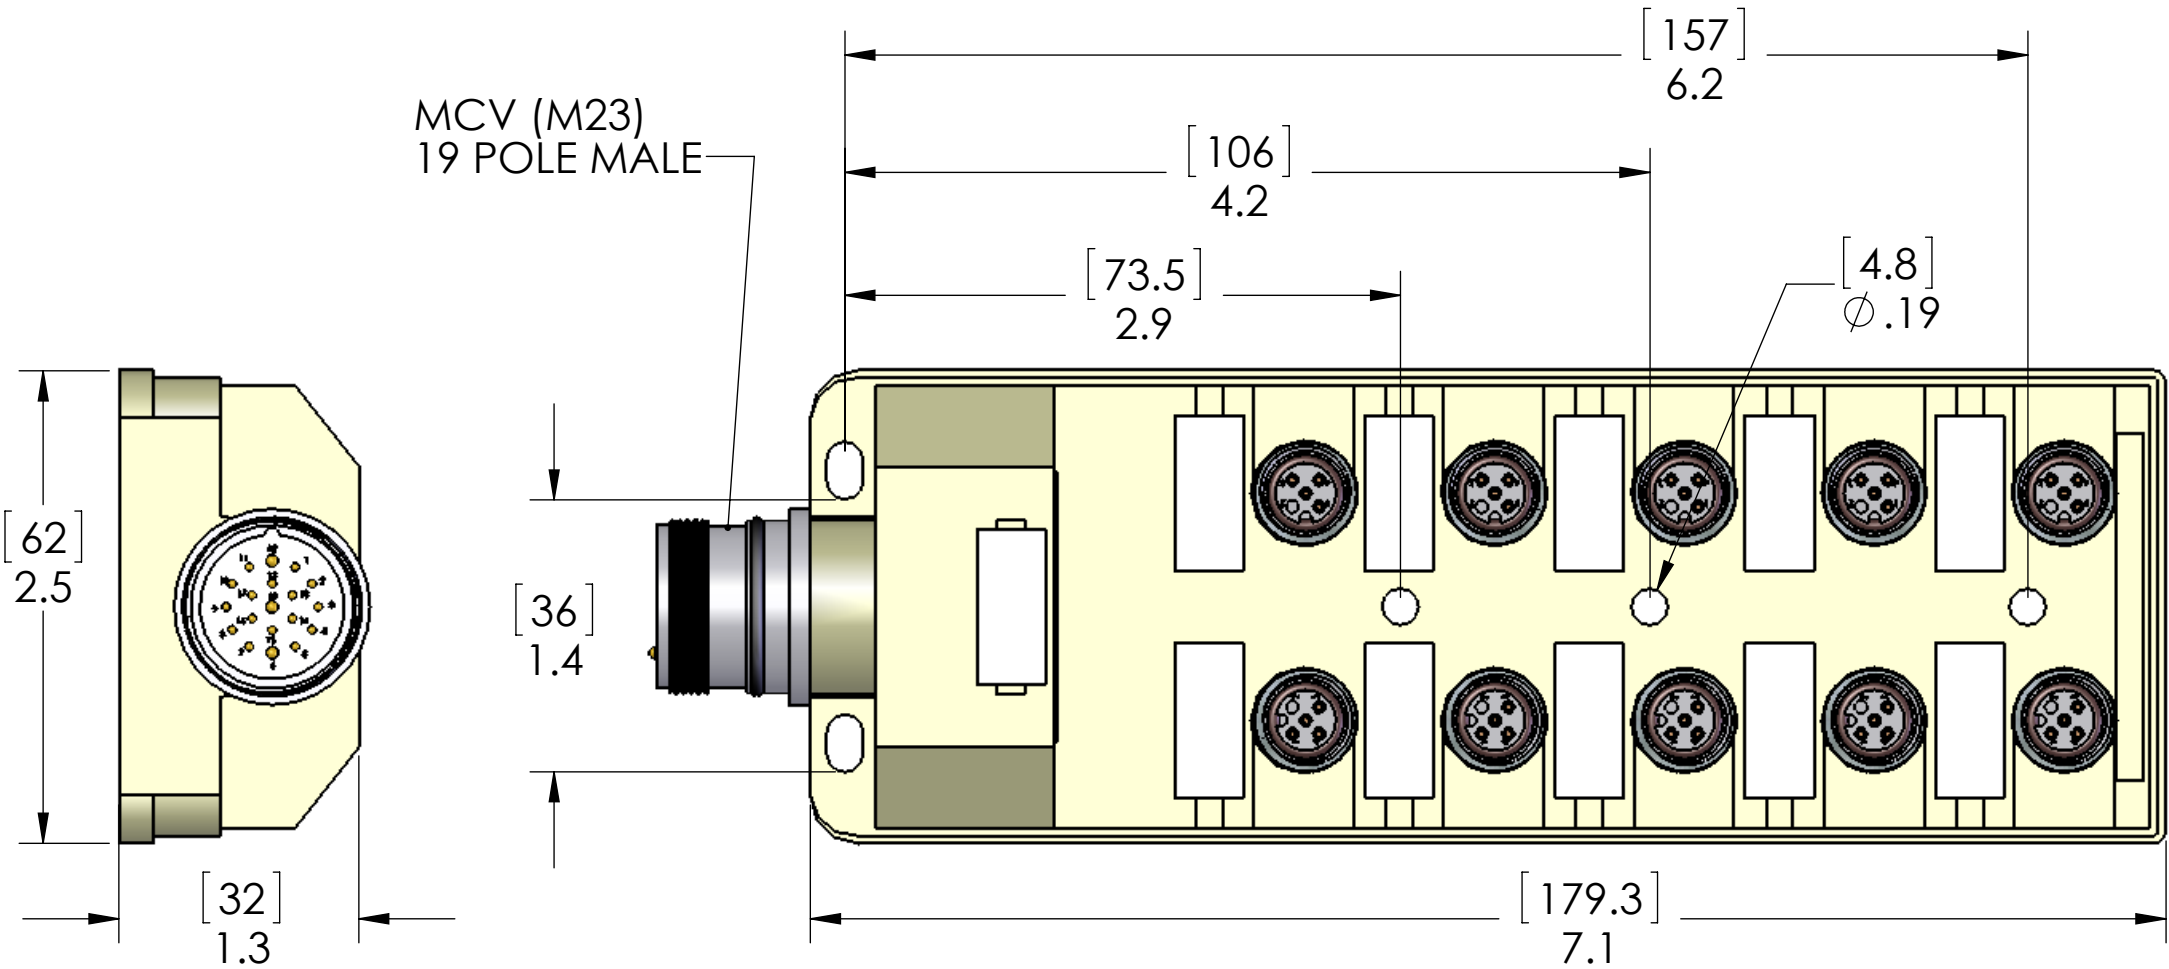

MATERIALS:	
BODY:	POLYPROPYLENE
MARKERS:	POLYAMIDE
SHELLS:	NICKEL PLATED BRASS
INSERTS:	POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
O-RINGS:	NBR
RATINGS:	
VOLTS:	48VDC MAX
AMPS:	3A PER PORT, 8A PER BLOCK

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:	NAME	MENCOM CORPORATION			
		DIMENSIONS ARE IN INCHES	DRAWN	JJH	TITLE:		
		TOLERANCES:	CHECKED				
		FRACTIONAL ±1/64	ENG APPR.				
		ANGULAR: MACH±5° BEND ±5°	MFG APPR.				
		TWO PLACE DECIMAL ±.01	Q.A.				
		THREE PLACE DECIMAL ±.004	COMMENTS:		SIZE	DWG. NO.	REV
		MATERIAL			B	JDC-040-019-V000	A
		FINISH					
		DO NOT SCALE DRAWING			SCALE: 1:1	WEIGHT:	SHEET 1 OF 1