



JDC (M12) Junction Blocks

6 Port, 4 Pin JDC Junction blocks




MIN Receptacle | MIN Plug | M23 Receptacle | IP67 Protection Rating



Trunk Style	UL Rating	Trunk Connection	Part Number		
			No LED	PNP	NPN
	N/A	MIN Size III 9 Pole Male Receptacle	JDC-640-009-M000	JDC-64P-209-M000	JDC-64N-209-M000
	N/A	M23 12 Pole Male Receptacle	JDC-640-012-V000	JDC-64P-212-V000	JDC-64N-212-V000
	N/A	MIN Size III 9 Pole Male Plug with Male Thread	JDC-640-009-M003	JDC-64P-209-M003	JDC-64N-209-M003
	N/A	MIN Size III 9 Pole Male Plug	JDC-640-009-M**	JDC-64P-209-M**	JDC-64N-209-M**

** Lengths in meters. Standard Cable lengths are 2m, 5m and 10m. Consult factory for other lengths.

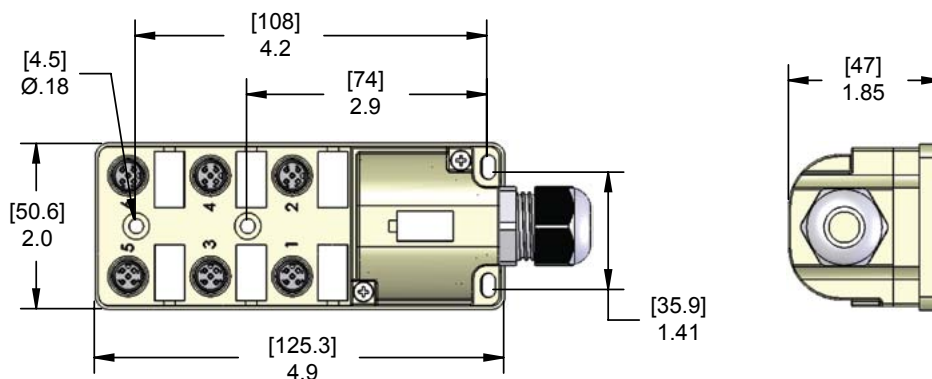

Specifications:

Ratings:

3 A per Connector

8 A per Block

Voltage:

Without LEDs: 0-150 Volt Max

With LEDs: 48 VDC Max in accordance with LED Configuration

Body:

Polypropylene

Inserts:

Polyamide

Port Coupling Nuts:

PBT

O-Ring:

BUNA-N

LED Lens:

Polycarbonate

Contacts:

Copper Alloy with Gold Plating

Marker Tags:

Polyamide (supplied on all units)