


REV	DATE	ECO	DESCRIPTION	BY	CK	APP
A	11/26/07	NA	ADDED A70P100-4A	JMM	NA	NA



AMP RATING	A	B	C	D	E	F	G	H
35-60	4.38 111.3mm	1.00 25.4mm	2.88 73.2mm	3.69 93.7mm	3.56 90.4mm	.31 7.9mm	.75 19.1mm	.06 1.5mm
65-100	4.38 111.3mm	1.22 31.0mm	2.88 73.2mm	3.69 93.7mm	3.56 90.4mm	.31 7.9mm	1.00 25.4mm	.19 4.8mm
110-200	5.09 129.3mm	1.50 38.1mm	2.84 72.1mm	4.16 106.0mm	3.53 89.7mm	.41 10.4mm	1.00 25.4mm	.25 6.4mm
225-400	5.09 129.3mm	2.00 50.8mm	2.84 72.1mm	4.16 106.0mm	3.53 89.7mm	.41 10.4mm	1.50 38.1mm	.25 6.4mm
450-600	7.09 180.1mm	2.50 63.5mm	2.84 72.1mm	5.63 143mm	4.06 103.1mm	.53 13.5mm	2.00 50.8mm	.38 9.7mm

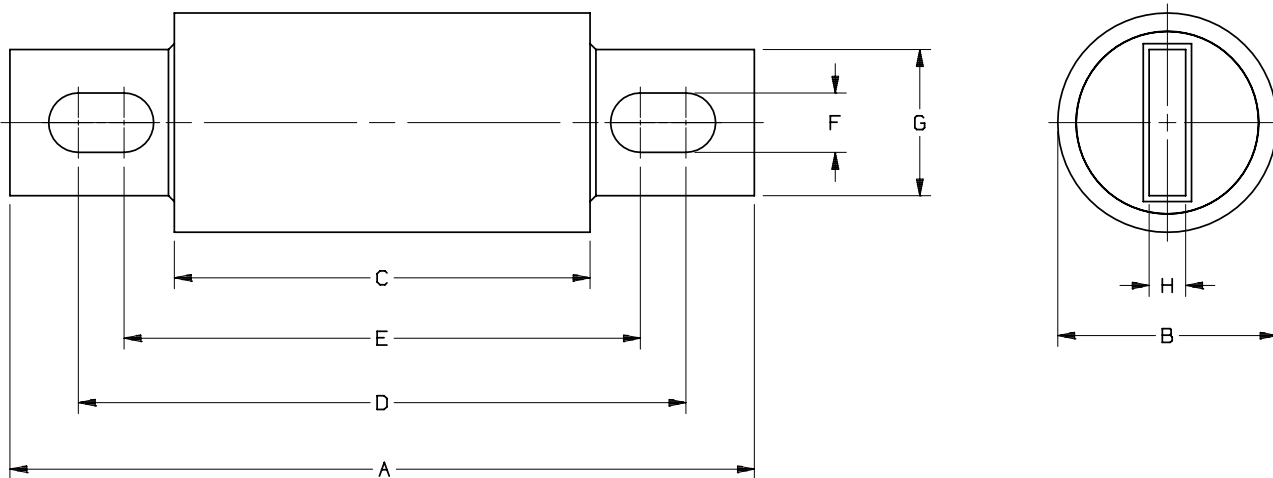

MERSEN USA NEWBURYPORT-MA, LLC
374 MERRIMAC STREET
NEWBURYPORT, MA 01950

A70P(35-600)-4, A70P100-4A

FORM 101

OUTLINE DIMENSIONS
NOT TO BE USED FOR PRODUCTION

PRODUCT MANAGER

DESIGN ENGINEER

SEMICONDUCTOR FUSE

700592

SIGN:

SIGN:

35-600AMPS 700V

DATE:

DATE: