


PIN #	COLOR	PIN #	COLOR
1	VIOLET	11	BLACK
2	RED	12	GRN / YEL
3	GRAY	13	YELLOW w/BRWN
4	RED w/BLUE	14	BROWN w/GRN
5	BLUE	15	WHITE
6	GREEN	16	YELLOW
7	BROWN	17	PINK
8	WHITE w/GRN	18	GRAY w/BRWN
9	WHITE w/YEL	19	GRAY w/PINK
10	WHITE w/GRY		

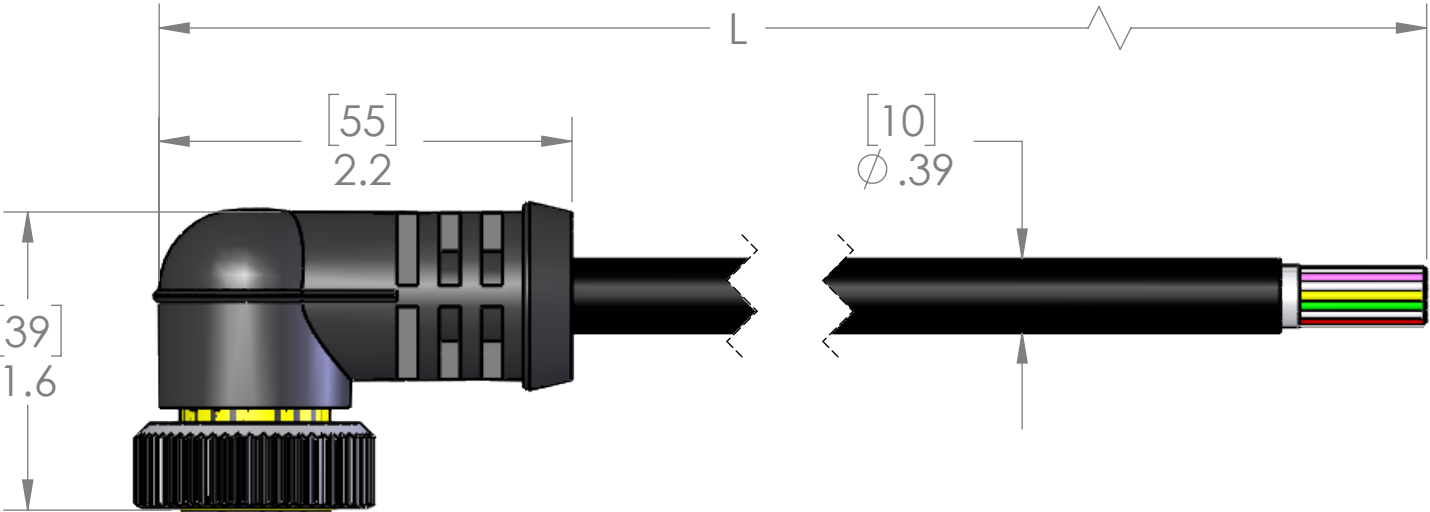

1.125 - 16UN
FEMALE

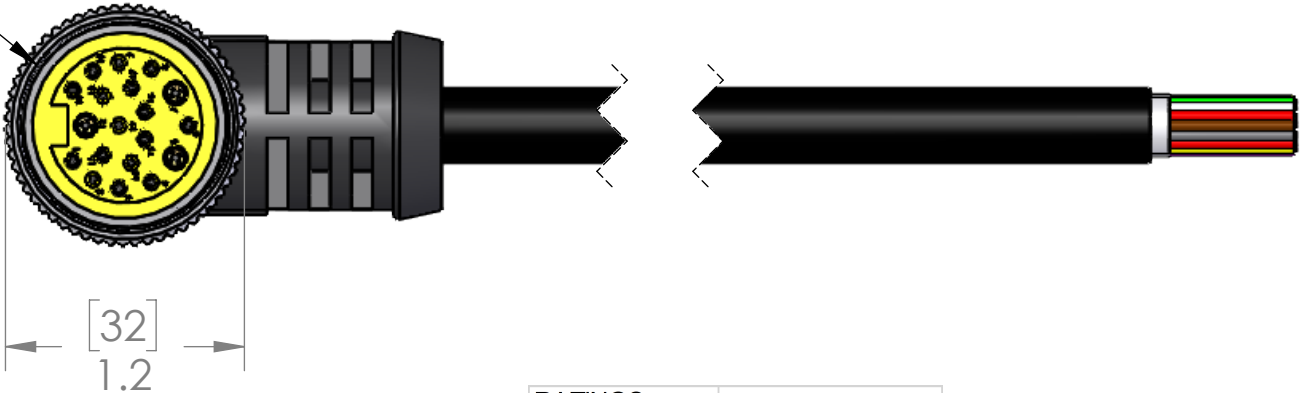


TABLE A		
P/N	L	STD?
MINF-19FP-0.5M-R	20"(0.5M)	NO
MINF-19FP-1M-R	40"(1M)	YES
MINF-19FP-1.5M-R	59"(1.5M)	NO
MINF-19FP-2M-R	79"(2M)	YES
MINF-19FP-3M-R	118"(3M)	NO
MINF-19FP-4M-R	157"(4M)	YES
MINF-19FP-5M-R	197"(5M)	YES
MINF-19FP-6M-R	236"(6M)	YES
MINF-19FP-8M-R	315"(8M)	NO
MINF-19FP-10M-R	393"(10M)	YES
MINF-19FP-15M-R	590"(15M)	NO
MINF-19FP-20M-R	786"(20M)	NO

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDER QUANTITIES

MATERIALS	
BODY:	BLACK PVC w/YELLOW INSERTS
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	18/3, 22/16 UL2661 TPE CABLE
COUPLINGS:	NICKEL PLATED BRASS
APPROVALS:	
US:	UL LISTED
CANADA:	C-UL LISTED
RoHS:	YES
CE:	YES
IP RATING:	IP69

Please note that to better serve the varying needs of our customers, these parts have been UL tested for two different amperage ratings as shown by our Ratings table.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

RATINGS:	
PIN 12	GROUND
PINS 5 & 7	300V, 6A
ALL OTHERS	300V, 1A
OR	
PIN 12	GROUND
PINS 5 & 7	300V, 4A
ALL OTHERS	300V, 2A

VOLTS	300V
AMPS	6A/1A OR 4A/2A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:		DRAWN BY	GO
DIMENSIONS ARE IN INCHES AND [MM]		DRAWN DATE	08/03/2020
		CHECKED BY	JJH
		CHECK DATE	08/03/2020
	COMMENTS:		
MATERIAL			
FINISH			
DO NOT SCALE DRAWING			

MENCOM CORPORATION		
TITLE:		
SIZE	DWG. NO.	REV
B	MINF-19FP-ZZ-R	A
SCALE: 1:2	WEIGHT:	SHEET 1 OF 1