

## TREE PROFINET managed Switch 5x10/100BT IP67 plastic M12

5 ports


PROFINET - Managed Switch


Connection cables are in the online shop under "Connection Technology".


## **Link to Product**


## Illustration



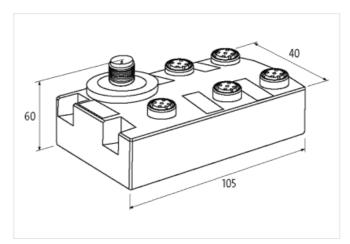



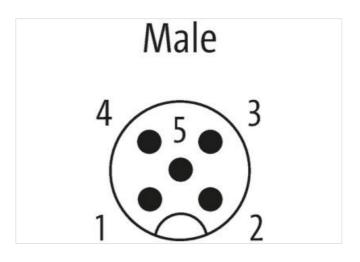





Technical Data	
Operating voltage	9.531.5 V
Transfer rate	10/100 Mbit/s full duplex
Operating modes	Autocrossing Autonegotiation
General data	
Mounting method	3 hole screw mounting
Temperature range	0+60 °C (storage temperature -40+85 °C)
Housing	Black plastic
Protection	IP67

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13



stay connected

Dimensions H×W×D	105×60×40 mm
Connections	
Fieldbus	5× M12 (female), D-coded
Supply	1× M12 (male), A-coded
PROFINET	
Specification	V2.3, Conformance Class B
Addressing	DCP
FSU (Fast-Start-Up)	no
PROFINET Netload Class	I
MRP	yes
Shared Device	no
Switch Management	
Protocols	DHCP, SNMP (v1, v2c, v3), RSTP, STP, LLDP, NTP, RMON, SSH (CLI)
Port Mirroring	yes
VLAN (QoS) IEEE 802.p	yes
Alarm contact	no
Remote maintenance	Open VPN
Webserver	HTTP, HTTPS
Switch Form	PROFINET - Managed Switch
Product article number of manufacturer	58184
Diagnostic	
Communication status	via LED, LLDP
Monitoring - no voltage	yes