

EXACT12 SAFETY, FIX. CABLE, P1-4 M12 5POLE LED,

P5-8 M12 4/3-pol 1:1 no LED, 3m PUR/PVC

PUR/PVC

8-way, 5-pole

3.0 m

Homerun cable with spring clamp terminals

4-/3-pole



Further cable lengths on request.

Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration

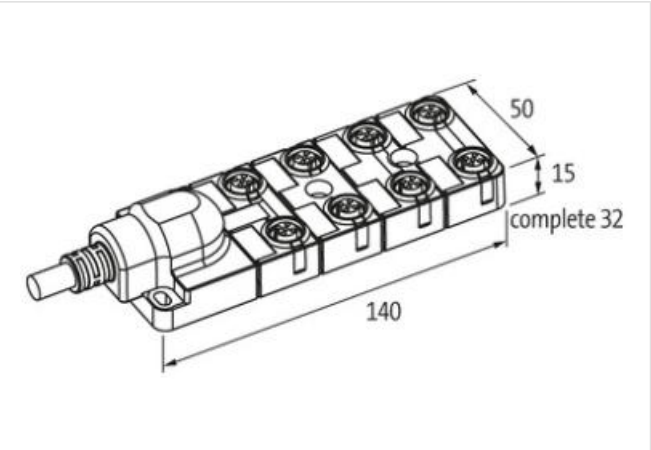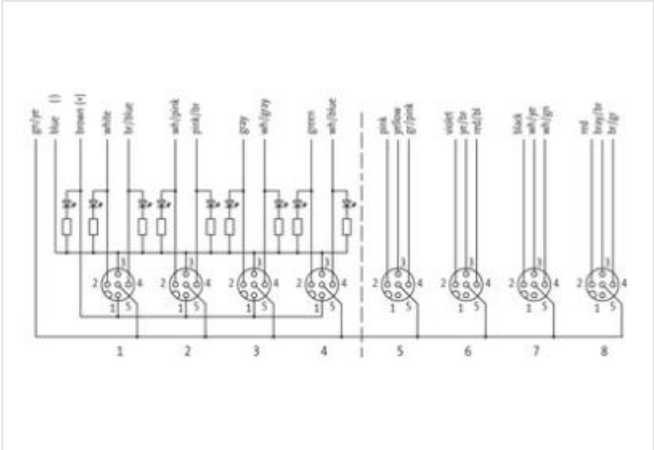

Product may differ from Image

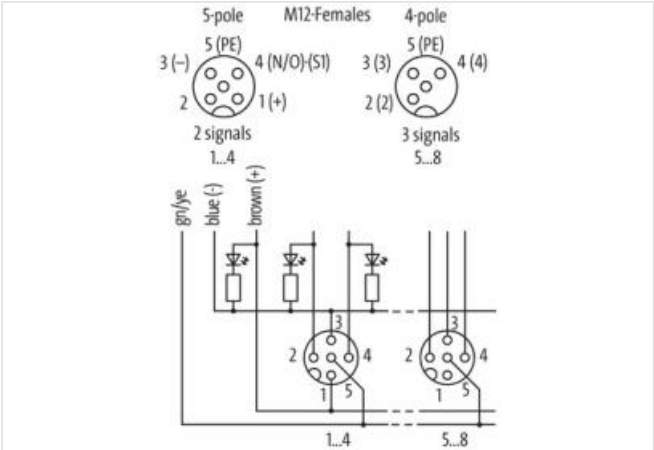

Technical Data	
Operating voltage	24 V DC
Operating current per contact	max. 4 A

Locking of ports	Screw thread (M12×1 mm)
------------------	-------------------------

Protection	IP65/IP67
------------	-----------

Housing	Plastic, flame retardant
---------	--------------------------

General data

Temperature range	-20...+60 °C, depending on cable quality
-------------------	--

Cables

No./diameter of wires	20× 0.34 + 3× 0.75 mm ²
-----------------------	------------------------------------

Wire isolation	PVC
----------------	-----

C-track properties	2 Mio.
--------------------	--------

Outer Ø	10.0 mm ±5%
---------	-------------

Cable number	407
--------------	-----

Jacket Color	gray
--------------	------

Temperature range (fixed)	-30...+80 °C
---------------------------	--------------

Temperature range (mobile)	-5...+60 °C
----------------------------	-------------

Bend radius (fixed)	10× outer Ø
---------------------	-------------

Bend radius (moving)	12× outer Ø
----------------------	-------------

Material (jacket)	PUR/PVC (UL/CSA)
-------------------	------------------

Contact Layout

PIN 1	(+) port 1...4
-------	----------------

PIN 2	(NC)/(S2) port 1...4; (S1) port 5...8
-------	---------------------------------------

PIN 3	(-) port 1...4; (S2) port 5...8
-------	---------------------------------

PIN 4	(NO)/(S1) port 1...4; (S3) port 5...8
-------	---------------------------------------

PIN 5	(Earth)
-------	---------

LED (green): Power / LED (yellow): (S1) / LED (white): Signal (S2) port 1...4	
---	--

Product article number of manufacturer	8000-98710-4070300
--	--------------------