

PIN #	WIRING	PIN #
1	-----	1
2	-----	2
3	-----	3
4	-----	4
5	-----	5
	ETC.	
19	-----	19

PINS 5, 7 & 12 ARE 18AWG

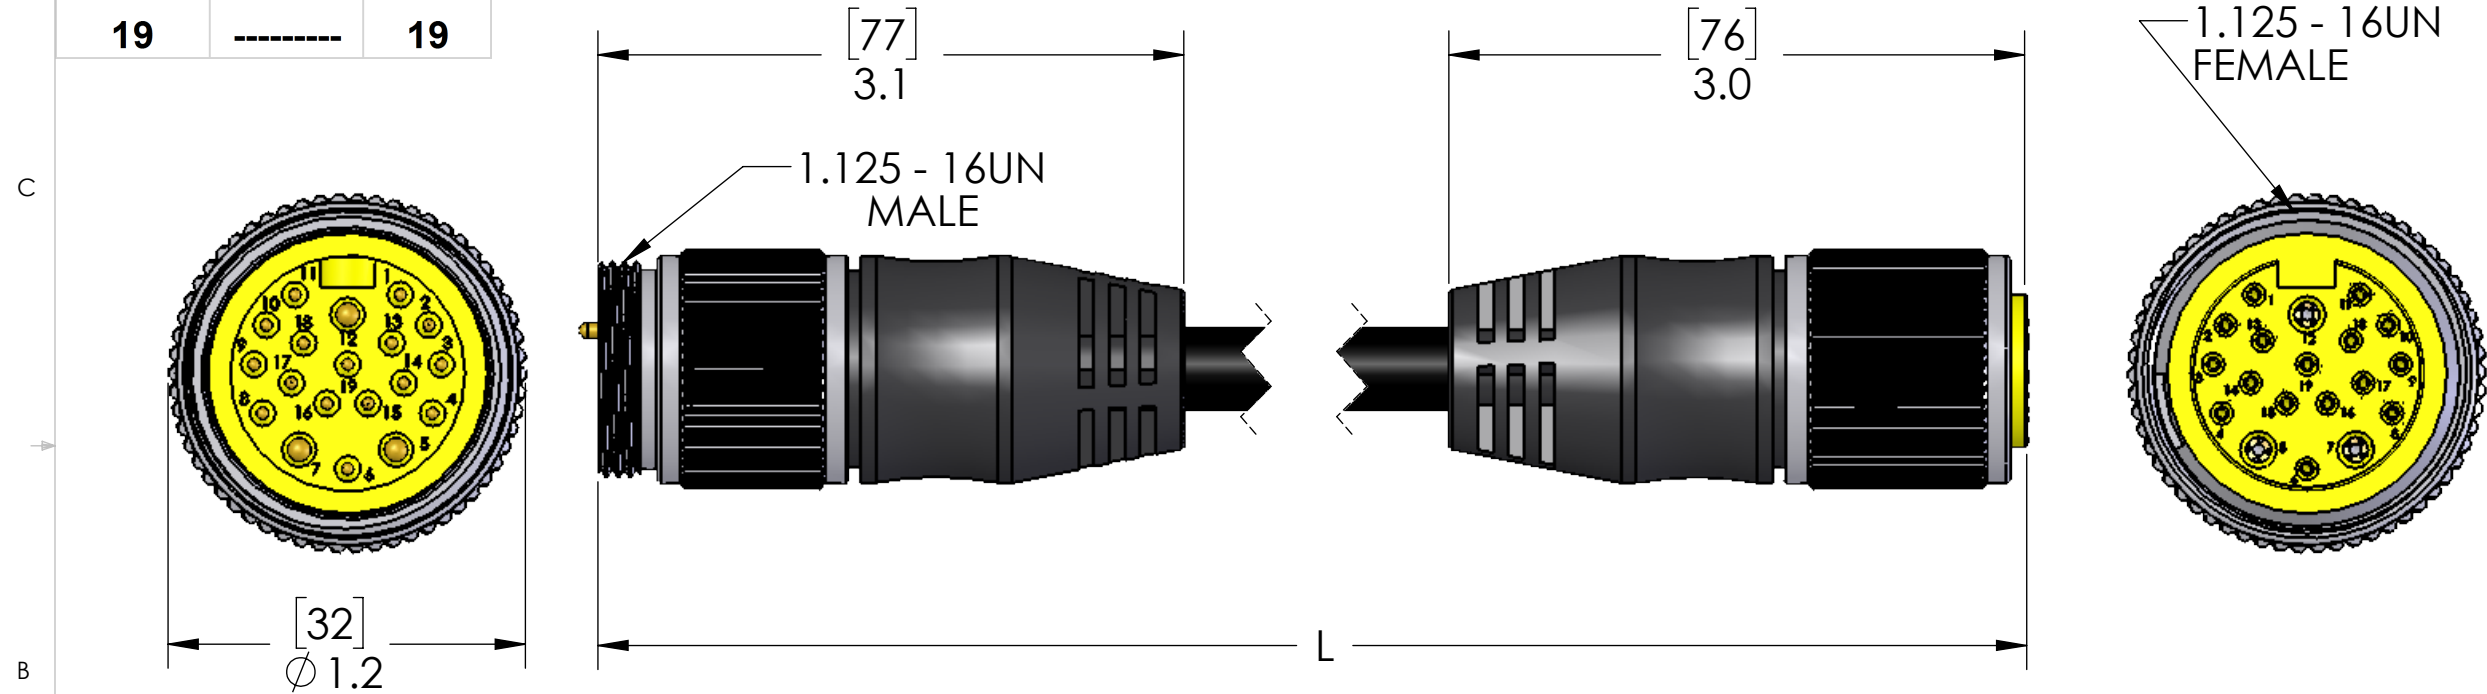


TABLE A		
P/N	L	STD?
MINP-19MFPM-1M	40"	NO
MINP-19MFPM-2M	79"	YES
MINP-19MFPM-3M	118"	NO
MINP-19MFPM-4M	157"	YES
MINP-19MFPM-5M	197"	YES
MINP-19MFPM-6M	236"	YES
MINP-19MFPM-8M	315"	NO
MINP-19MFPM-10M	393"	YES
MINP-19MFPM-15M	590"	NO
MINP-19MFPM-20M	786"	NO
MINP-19MFPM-25M	983"	NO
MINP-19MFPM-30M	1179"	NO

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDER QUANTITIES

MATERIALS	
BODY:	BLACK PUR
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	18/3, 22/16 PUR JACKETED CABLE
COUPLINGS:	NICKEL PLATED BRASS
APPROVALS	
U.S.	UL LISTED
CANADA	C-UL LISTED

Please note that to better serve the varying needs of our customers, these parts have been UL tested for two different amperage ratings as shown by our Ratings table.

RATINGS:	
PIN 12	GROUND
PINS 5 & 7	300V, 6A
ALL OTHERS	300V, 1A
OR	
PIN 12	GROUND
PINS 5 & 7	300V, 4A
ALL OTHERS	300V, 2A

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	300V
AMPS	6A/1A or 4A/2A
TEMP:	80°C

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]	DRAWN BY	ADM
	DRAWN DATE	07/09/2018
	CHECKED BY	ADM
	CHECK DATE	07/12/2018
MATERIAL	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION		
TITLE: 19 PL MIN M-F EXT		
SIZE B	DWG. NO. MINP-19MFPM-ZZ	REV B
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1