PIN #	COLOR
1	BLACK
2	GREEN/YELLOW
3	RED
4	WHITE

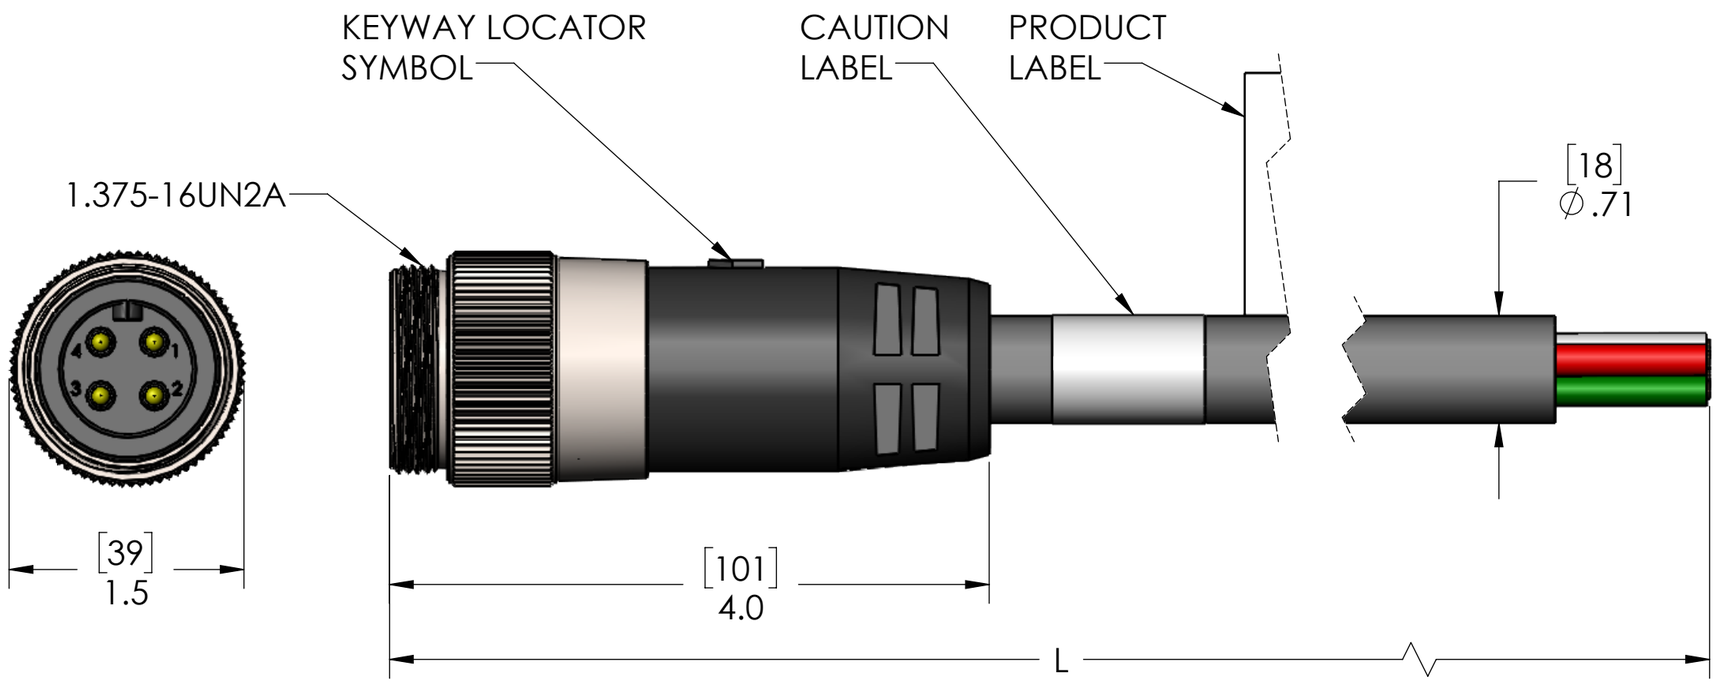

P/N	L	STD?
PMIN-40MP-1M	40" [1m]	YES
PMIN-40MP-2M	79" [2m]	YES
PMIN-40MP-3M	117" [3m]	NO
PMIN-40MP-4M	157" [4m]	YES
PMIN-40MP-5M	197" [5m]	YES
PMIN-40MP-6M	236" [6m]	NO
PMIN-40MP-8M	315" [8m]	NO
PMIN-40MP-10M	393" [10m]	YES
PMIN-40MP-15M	590" [15M]	YES
PMIN-40MP-20M	787" [20M]	YES

PARTS LISTED AS NOT BEING STANDARD
MAY REQUIRE MINIMUM ORDERS
OTHER LENGTHS AVAILABLE,
PLEASE CONSULT FACTORY

MATERIALS	
BODY:	BLACK PVC
INSERT:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	10/4 STOOW GRAY PVC
COUPLING:	NICKEL PLATED BRASS

RATINGS:	
SCCR RATING:	65kA Breakers and Fuses
RoHS COMPLIANT:	Yes
PROTECTION:	IP67
UL CATEGORY:	PVVA (US), PVVA7 (Canada)
U.S.	UL 2237 LISTED, File E469485
CANADA	C-UL 2237 LISTED, File E469485

CAUTION:

RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

VOLTS	600V
AMPS	32A
TEMP:	-40° to 90°C

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

DRAWN BY	ADM
DRAWN DATE	06/22/2020
CHECKED BY	GO
CHECK DATE	06/23/2020

COMMENTS:

MENCOM CORPORATION

TITLE:

4 PL MAL PLG PMIN
10AWG

SIZE	DWG. NO.	REV
B	PMIN-40MP-ZZ	B

SCALE: 1:1 | WEIGHT: | SHEET 1 OF 1