



MPS POWER SUPPLY 1-PHASE,

IN: 95-265VAC OUT: 24V/3ADC

INPUT: 95...265 V AC  
OUTPUT: 24 V DC  
Current: 3 A

Link to Product

Illustration

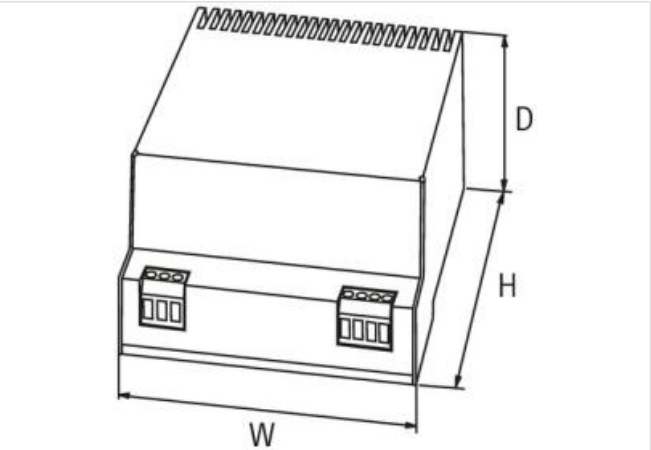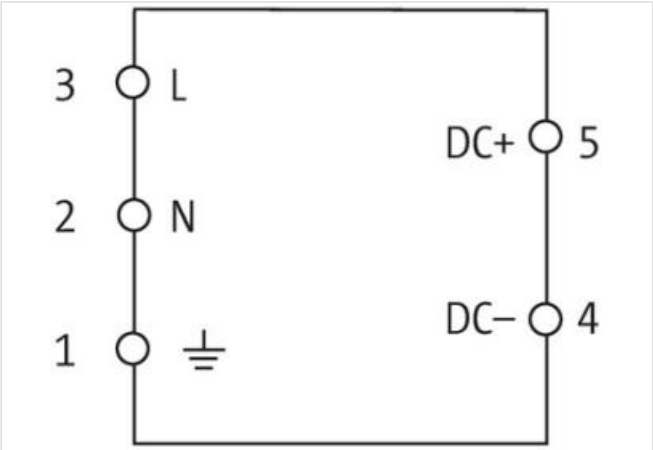

Product may differ from Image



General data	
Standards	IEC 61010-2-201, EN 61204-3, EN 55022 B
Mounting method	DIN-rail mountable TH35 (EN 60715), additional plate for screw mounting Art.-No. 89500
Temperature range	0...+60 °C (storage temperature -25...+85 °C)
Relative humidity	5...95%, no condensation
Efficiency	84%
Dimensions HxWxD	132x75x71 mm
Output	

Output voltage	24 V DC (SELV), +3/-1%
LED display	LED (green) at min. 22 V DC
Output current	3 A (+60 °C); 3.5 A (+40 °C)
Mains failure bridging time	min. 8.3 ms (115 V AC); min. 80 ms (230 V AC)
Ripple	max. 20 mV eff/rms
Spikes	max. 100 mV ss/pp
Unit protection	short-circuit and overload protected
Parallel usage/serial usage	no/yes

#### Input

Input voltage	95...265 V AC
Primary fusing external	max. 10 A
Input current	1.5 A (115 V AC); 0.75 A (230 V AC)
Inrush current after 1 ms	max. 20 A
Frequency	50...60 Hz

Product article number of manufacturer	85051
--	-------