

TREE M-5TX IP67 Lite managed Switch 5 Ports

5x10/100BT IP67

5 port managed switch


5× M12 (female), D-coded

Supply PIN 1/3


Connection cables are in the online shop under "Connection Technology".

[Link to Product](#)


Illustration

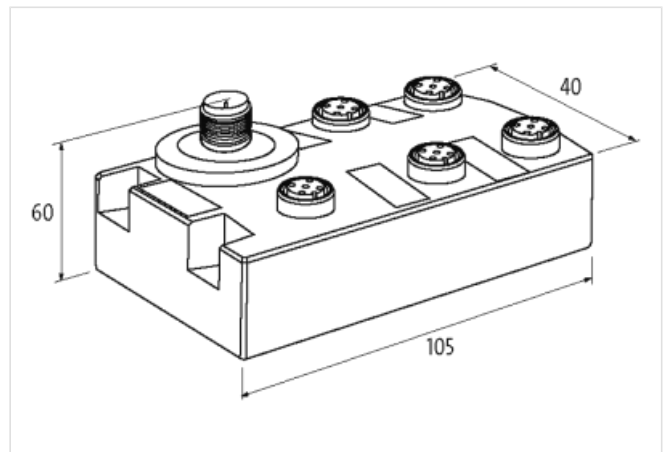


Female



Male



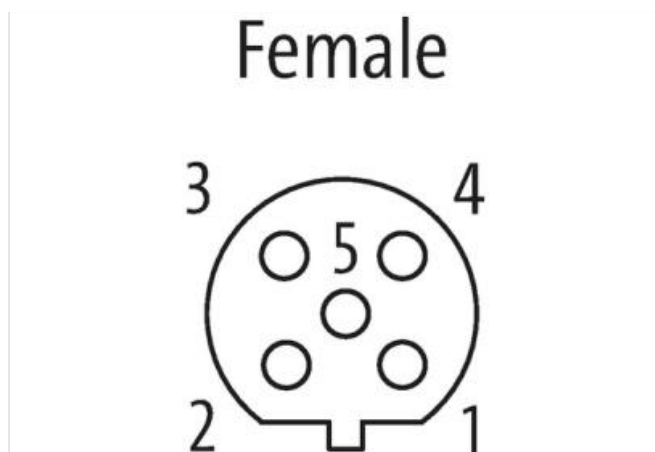

Product may differ from Image

| Technical Data | |
|--|---|
| Operating voltage | 9.5...31.5 V |
| Transfer rate | 10/100 Mbit/s full duplex |
| Operating modes | Autocrossing Autonegotiation |
| General data | |
| Mounting method | 3 hole screw mounting |
| Temperature range | 0...+60 °C (storage temperature -40...+85 °C) |
| Housing | Black plastic |
| Protection | IP67 |
| Dimensions H×W×D | 105×60×40 mm |
| Connections | |
| Fieldbus | 5× M12 (female), D-coded |
| Supply | 1× M12 (male), A-coded |
| Switch Management | |
| Protocols | DHCP, SNMP (v1, v2c, v3), RSTP, STP, LLDP, NTP, RMON, SSH (CLI) |
| Port Mirroring | yes |
| VLAN (QoS) IEEE 802.p | yes |
| Alarm contact | no |
| Remote maintenance | Open VPN |
| Webserver | HTTP, HTTPS |
| Switch Form | Lite - Managed Switch |
| Product article number of manufacturer | 58183 |
| Diagnostic | |
| Communication status | via LED, LLDP |
| Monitoring - no voltage | yes |