

EXACT8, 8XM8, 3 POLE BASIC HOUSING, NPN-LED'S

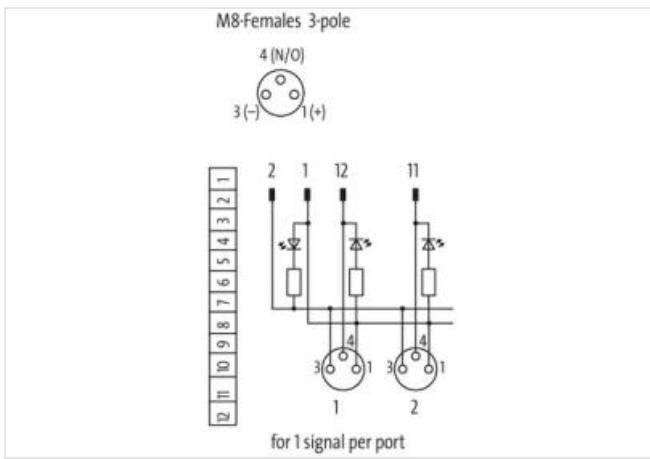
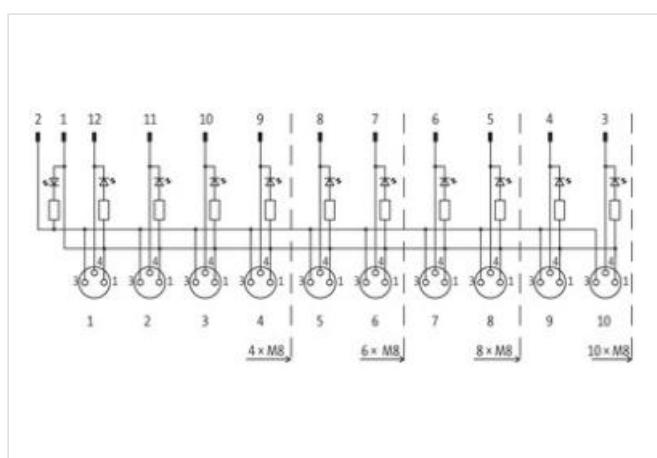
Without connector cable

8-way, 3-pole

Inline face or side mounting
for NPN signals 24 V DC

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[**Link to Product**](#)
Illustration


Product may differ from Image


Technical Data

Operating voltage	24 V DC
Operating current per contact	max. 2 A
Protection	IP65/IP67
Total current	max. 8 A

General data

Temperature range -20...+70 °C, depending on cable quality

Contact Layout

PIN 1	(+)
PIN 3	(-)
PIN 4	(NO)/(S1)
LED (green): Power / LED (yellow): (S1)	

Product article number of manufacturer 8000-88001-0000000